

THIMBLE WITH LINK

TYPE K10



Material : Thimble mild steel
Link alloy steel queched and tempered

Finish : Painted

Temperature range : -4°F up to +392°F

Standard certification : Certificate of Conformity

Suitable for fibre rope

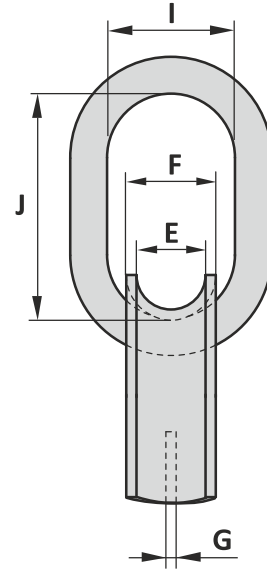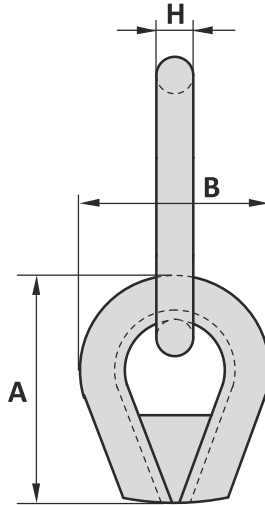

Can be assembled with different type of thimbles on request

Art. No.	Rope size inch	MBL link ton	A inch	B inch	E inch	F inch	G inch	H inch	I inch	J inch	Weight lbs
17090000	9 - 10 ½	144	15 ⅝	11 ⅜	3 ⅜	5 ⅜	⅝	2	7 ⅜	13 ⅜	86
17090000	9 - 10 ½	188	15 ⅝	11 ⅜	3 ⅜	5 ⅜	⅝	2 ¼	7 ⅜	15 ¾	99
17125000	12 ½ - 13	188	18 ½	12 ⅞	4 ⅞	6 ⅞	⅞	2 ¼	7 ⅜	15 ¾	123
17125000	12 ½ - 13	232	18 ½	12 ⅞	4 ⅞	6 ⅞	⅞	2 ⅝	9 ⅜	16 ⅝	141
17140000	14 - 15	232	22 ⅜	15 ⅜	5 ⅜	6 ⅜	⅞	2 ⅝	9 ⅜	16 ⅝	174
17140000	14 - 15	336	22 ⅜	15 ⅜	5 ⅜	6 ⅜	⅞	2 ⅞	9 ⅜	17 ⅝	201
17160000	16 - 18	336	22 ⅜	15 ⅜	6 ⅜	7 ⅜	⅞	2 ⅞	9 ⅜	17 ⅝	203
17160000	16 - 18	420	22 ⅜	15 ⅜	6 ⅜	7 ⅜	⅞	3 ⅜	9 ⅜	17 ⅝	229
17190000	19 - 20	420	23 ⅜	17 ⅜	7 ⅜	8 ⅜	⅞	3 ⅜	9 ⅜	17 ⅝	256
17190000	19 - 20	524	23 ⅜	17 ⅜	7 ⅜	8 ⅜	⅞	3 ⅜	11 ⅜	18 ⅝	302
17210000	20 - 21	524	24 ⅜	18 ⅜	8 ⅜	9 ⅜	⅞	3 ⅜	11 ⅜	18 ⅝	324
17210000	20 - 21	628	24 ⅜	18 ⅜	8 ⅜	9 ⅜	⅞	3 ⅜	11 ⅜	19 ⅝	379
17210000	20 - 21	1000	24 ⅜	18 ⅜	8 ⅜	9 ⅜	⅞	4 ⅜	15 ¾	23 ⅝	516


Tolerance: Forged parts ± 5%

GN ROPE FITTINGS

North American Stocking Distributor

8125 Saran Dr. • Playa del Rey, CA 90293
Phone: 310.448.5444 • Fax: 310.448.5446

sales@awrrinc.com
www.AssociatedWireRope.com





THIMBLE WITH LINK

TYPE K10

Material : Thimble mild steel
Link alloy steel queched and tempered
Finish : Painted
Temperature range : -20°C up to +200°C
Standard certification : Certificate of Conformity

Suitable for fibre rope

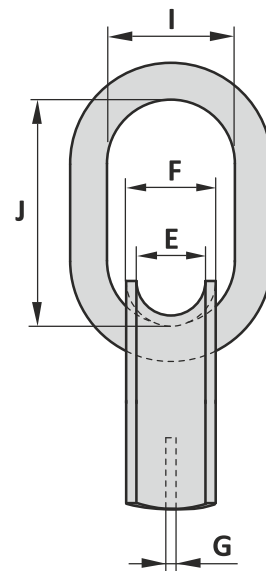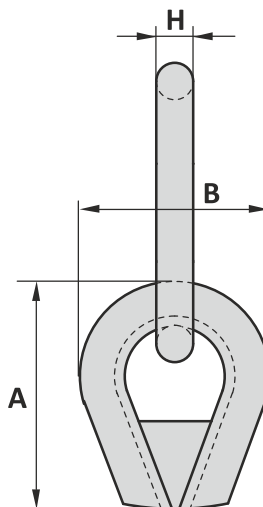

Can be assembled with different type of thimbles on request

Art. No.	Rope size inch	MBL link ton	A mm	B mm	E mm	F mm	G mm	H mm	I mm	J mm	Weight kg
17090000	9 - 10 ½	144	385	300	100	130	16	51	190	350	39
17090000	9 - 10 ½	188	385	300	100	130	16	57	200	400	45
17125000	12 ½ - 13	188	470	320	115	155	20	57	200	400	56
17125000	12 ½ - 13	232	470	320	115	155	20	63	230	430	64
17140000	14 - 15	232	560	390	135	175	20	63	230	430	79
17140000	14 - 15	336	560	390	135	175	20	72	250	440	91
17160000	16 - 18	336	560	390	155	195	20	72	250	440	92
17160000	16 - 18	420	560	390	155	195	20	80	250	450	104
17190000	19 - 20	420	600	450	180	220	20	80	250	450	116
17190000	19 - 20	524	600	450	180	220	20	90	300	460	137
17210000	20 - 21	524	620	480	205	245	20	90	300	460	147
17210000	20 - 21	628	620	480	205	245	20	100	300	500	172
17210000	20 - 21	1000	620	480	205	245	20	115	400	600	234

Tolerance: Forged parts ± 5%

GN ROPE FITTINGS

North American Stocking Distributor

8125 Saran Dr. • Playa del Rey, CA 90293
Phone: 310.448.5444 • Fax: 310.448.5446
sales@awrrinc.com
www.AssociatedWireRope.com

Associated
WIRE ROPE & RIGGING



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS