


CAST THIMBLE

TYPE K14

Material	: Cast steel Stainless steel
Finish	: Galvanised (mild steel) Self coloured (stainless steel) Plastic coating on request
Temperature range	: -4°F up to +392°F
Standard certification	: Certificate of Conformity 3.1 material certificate EN 10204

Suitable for fibre rope

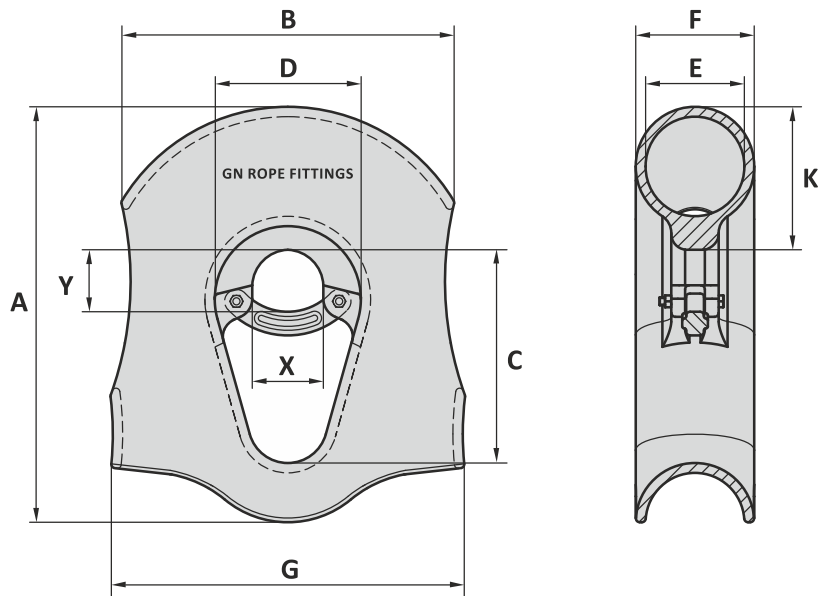


For connecting to a special shackle we can change dimension X and Y on request

Art. No. steel	Art. No. st. steel	Rope size inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	K inch	X inch	Y inch	Weight lbs
16001113	21001113	11 - 13	20 ³ / ₁₆	12 ¹⁹ / ₃₂	10 ⁵ / ₁₆	6 ⁷ / ₁₆	5 ³ / ₁₆	6 ³ / ₁₆	18 ²⁵ / ₃₂	6 ¹ / ₁₆	4 ¹ / ₈	4 ¹ / ₈	115
16001415	21001415	14 - 15	25 ²⁵ / ₃₂	18 ³ / ₄	14 ¹ / ₁₆	10 ¹ / ₃₂	6 ¹ / ₁₆	7 ⁷ / ₁₆	23 ³ / ₁₆	7 ⁷ / ₁₆	4 ⁹ / ₁₆	4 ⁹ / ₁₆	183
16001618	21001618	16 - 18	31 ³ / ₁₆	21 ¹ / ₃₂	14 ³ / ₃₂	11 ¹ / ₈	7 ¹ / ₄	8 ¹ / ₃₂	28 ³ / ₈	9 ¹ / ₁₆	5 ¹ / ₃₂	5 ¹ / ₂	260
16001921	21001921	19 - 21	37	25 ⁷ / ₈	18	13 ¹ / ₁₆	8 ³ / ₃₂	10 ⁵ / ₃₂	34 ³ / ₃₂	12 ⁷ / ₃₂	6 ⁷ / ₃₂	6 ³ / ₃₂	694
16002224	21002224	22 - 24	41 ¹ / ₁₆	32 ¹ / ₁₆	22 ³ / ₈	16 ¹ / ₈	9 ³ / ₈	11 ¹ / ₄	34 ¹ / ₈	14 ³ / ₁₆	7 ³ / ₃₂	7 ⁷ / ₈	895

Tolerance: Casted parts ± 5%, machined parts ± 1/32 inch

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
Phone: 310.448.5444 • Fax: 310.448.5446
sales@awrrinc.com
www.AssociatedWireRope.com




CAST THIMBLE

TYPE K14

Material : Cast steel
Stainless steel
Finish : Galvanised (mild steel)
Self coloured (stainless steel)
Plastic coating on request
Temperature range : -20°C up to +200°C
Standard certification : Certificate of Conformity
3.1 material certificate EN 10204

Suitable for fibre rope

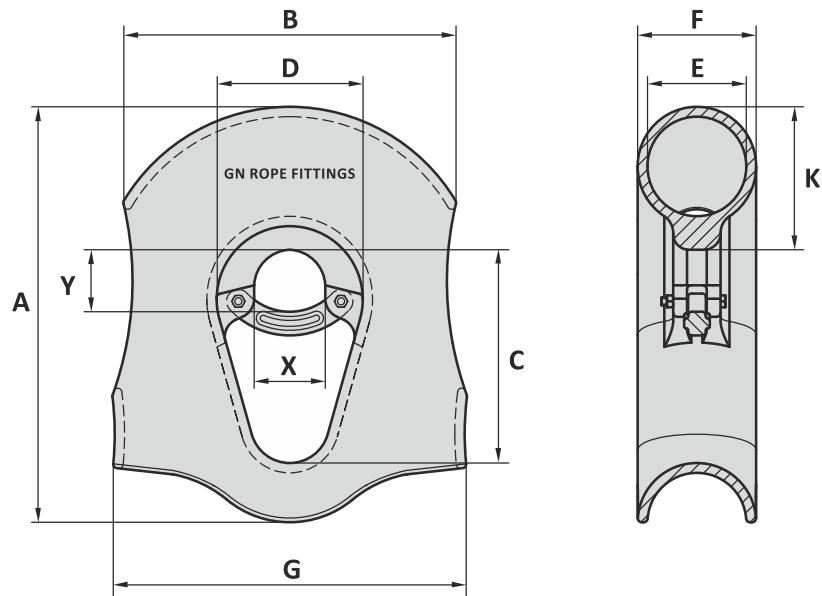


For connecting to a special shackle we can change dimension X and Y on request

Art. No. steel	Art. No. st. steel	Rope size inch	A mm	B mm	C mm	D mm	E mm	F mm	G mm	K mm	X mm	Y mm	Weight kg
16001113	21001113	11 - 13	530	320	270	175	132	157	477	170	105	105	52
16001415	21001415	14 - 15	655	476	357	258	154	183	598	200	116	124	83
16001618	21001618	16 - 18	795	542	380	283	184	212	721	252	136	140	118
16001921	21001921	19 - 21	940	657	457	348	209	261	880	309	158	177	315
16002224	21002224	22 - 24	1043	814	575	410	244	298	867	360	180	200	406

Tolerance: Casted parts $\pm 5\%$, machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
Phone: 310.448.5444 • Fax: 310.448.5446
sales@awrrinc.com
www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS