

Standard Reeve Crane Blocks

Blocks shown in this section may be used on a wide variety of land based cranes such as mobile and crawler cranes. Standard Reeve Blocks are an excellent choice where frequent easy block change is not a required main feature, or lifting height is limited:



- Double sealed maintenance free roller bearings
- Design Factor of Safety of 4:1
- Forged high tensile steel DIN hooks
- Ductile Iron sheaves, featuring graphite lubricated groove
- High impact resistant side plates
- Operational temperature range: -40 up to +80 °C / -40 up to +176 °F
- Lubrication on hook suspension
- Short design for increased lifting height
- Safety latch with locking pin
- C3M finish in signal yellow

Recommended finish

Segment / application	ISO 12944 classification	Classification description	Expected protection duration	DFT (µm)
Construction	C2M	Slightly polluted atmosphere, predominately agriculture areas	5 to 15 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	2 to 5 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	280
Cargo handling	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	280
Offshore	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	300
Offshore	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	300
Offshore	C5-MH	Coastal areas and open sea with high salt content in air	more than 15 year	320
Offshore	NORSOK sys. 1*	Open sea with high salt content in air	more than 15 year	300

Standard Reeve Crane Blocks

1 sheave

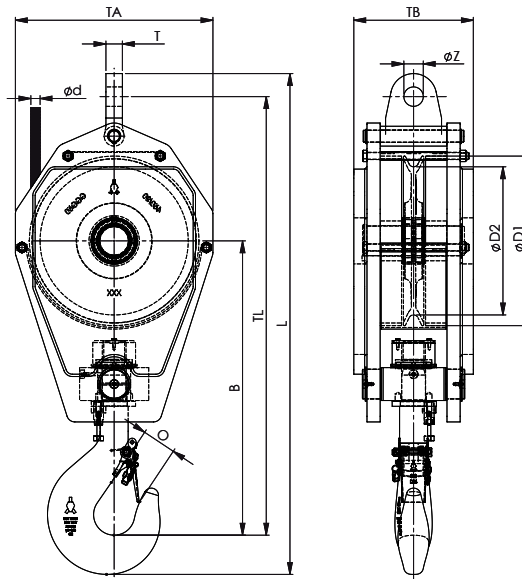

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Dimensions (inch)										Weight
	UStons	inch	øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 225.xx.1.12.5.E	13.75	3/8 - 9/16	10.2	8.9	20.6	2.5	13.6	6.7	31.4	35.9	TBD	TBD	165
SRB 225.xx.1.16.E	17.6	3/8 - 9/16	10.2	8.9	21.6	2.5	13.6	7.1	32.4	36.9	TBD	TBD	220
SRB 260.xx.1.12.5.E	13.75	7/16 - 5/8	11.8	10.2	21.6	2.5	15.7	7.3	32.8	37.3	TBD	TBD	240
SRB 260.xx.1.16.E	17.6	7/16 - 5/8	11.8	10.2	21.6	2.5	15.7	7.3	32.8	37.3	TBD	TBD	240
SRB 285.xx.1.16.E	17.6	1/2 - 3/4	12.6	11.0	23.9	2.8	16.5	6.5	35.7	40.7	TBD	TBD	350
SRB 320.xx.1.16.E	17.6	9/16 - 3/4	14.4	12.6	24.7	2.8	17.7	8.1	37.4	42.6	TBD	TBD	350
SRB 355.xx.1.16.EA	17.6	9/16 - 7/8	16.1	14.0	26.3	2.8	19.7	7.7	39.9	44.8	TBD	TBD	400
SRB 355.xx.1.20.E	22	9/16 - 7/8	16.1	14.0	28.1	3.1	19.7	8.9	41.5	47.4	TBD	TBD	550
SRB 400.xx.1.29.E	32	5/8 - 1	18.1	15.7	29.3	3.1	22.4	9.4	44.4	50.1	TBD	TBD	640
SRB 450.xx.1.32.EA	35	3/4 - 1 1/8	20.3	17.7	32.8	3.5	23.6	13.8	49.4	56.0	TBD	TBD	1000
SRB 450.xx.1.32.EB	35	3/4 - 1 1/8	20.3	17.7	32.8	3.5	23.6	16.1	49.4	56.0	TBD	TBD	130
SRB 528.xx.1.32.EA	35	7/8 - 1 1/4	23.5	20.8	35.4	3.5	28.0	10.2	53.6	60.2	TBD	TBD	1050
SRB 528.xx.1.32.EB	35	7/8 - 1 1/4	23.5	20.8	35.4	3.5	28.0	11.8	53.6	60.2	TBD	TBD	1300
SRB 528.xx.1.32.ED	35	7/8 - 1 1/4	23.5	20.8	35.4	3.5	28.0	18.1	53.6	60.2	TBD	TBD	2000
SRB 450.xx.1.40.E	45	3/4 - 1 1/8	20.3	17.7	42.3	3.9	23.6	16.1	58.5	65.6	TBD	TBD	1300
SRB 450.xx.1.50.E	55	3/4 - 1 1/8	20.3	17.7	36.1	3.9	23.8	12.7	52.7	59.7	TBD	TBD	1300
SRB 528.xx.1.50.EB	55	7/8 - 1 1/4	23.5	20.8	36.8	4.4	28.0	13.9	55.6	63.1	TBD	TBD	1650
SRB 575.xx.1.50.E	55	1 1/16 - 1 1/4	25.6	22.6	37.7	4.4	30.3	13.1	57.4	65.4	TBD	TBD	2045
SRB 630.xx.1.64.E	70	1 - 1 3/8	28.3	24.8	38.8	4.4	32.5	13.9	59.9	68.0	TBD	TBD	2200
SRB 670.xx.1.64.E	70	1 - 1 1/2	29.9	26.4	46.2	4.4	34.3	18.6	68.4	76.6	TBD	TBD	3000

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.





SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



Standard Reeve Crane Blocks

2 sheaves

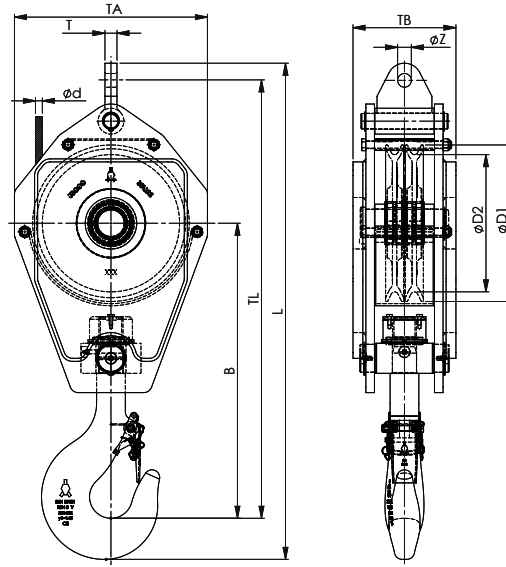

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Dimensions (inch)										Weight
	UStons	inch	øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 225.xx.2.16.E	17.6	3/8 - 1/8	11.8	10.2	23.3	2.8	15.7	6.5	34.6	39.5	TBD	TBD	240
SRB 260.xx.2.16.E	17.6	7/16 - 5/8	11.8	10.2	23.3	2.8	15.7	6.5	34.6	39.5	TBD	TBD	285
SRB 285.xx.2.16.E	17.6	1/2 - 3/4	12.6	11.0	23.9	2.8	16.5	6.5	35.7	40.7	TBD	TBD	210
SRB 285.xx.2.20.EA	22	1/2 - 3/4	12.6	11.0	26.3	3.1	16.5	6.5	38.1	43.4	TBD	TBD	285
SRB 285.xx.2.20.EB	22	1/2 - 3/4	12.6	11.0	26.3	3.1	16.5	7.7	38.1	43.4	TBD	TBD	330
SRB 320.xx.2.20.E	22	3/4 - 1/2	14.4	12.6	27.1	3.1	17.7	7.7	39.8	45.1	TBD	TBD	350
SRB 320.xx.2.22.E	24	3/4 - 1/2	14.4	12.6	27.1	3.1	17.7	7.9	39.8	45.6	TBD	TBD	350
SRB 320.xx.2.25.E	27.5	3/4 - 1/2	14.4	12.6	27.1	3.1	17.7	9.4	39.8	45.1	TBD	TBD	450
SRB 355.xx.2.29.E	32	7/8 - 1	16.1	14.0	28.1	3.1	19.7	9.6	41.9	47.4	TBD	TBD	550
SRB 400.xx.2.29.E	32	1 - 1 1/8	18.1	15.7	29.3	3.1	22.4	9.8	44.4	50.1	TBD	TBD	705
SRB 450.xx.2.40.E	45	1 1/8 - 1 1/2	20.3	17.7	35.2	3.9	23.6	13.1	52.0	58.1	TBD	TBD	1210
SRB 450.xx.2.50.E	55	1 1/8 - 1 1/2	20.3	17.7	35.2	4.4	23.6	13.1	52.0	59.6	TBD	TBD	1210
SRB 528.xx.2.64.E	70	1 1/2 - 1 3/4	23.4	20.8	39.5	4.4	28.0	15.9	58.4	65.9	TBD	TBD	2155
SRB 528.xx.2.80.E	88	1 3/4 - 2	23.4	20.8	43.7	4.9	28.0	16.3	62.6	71.2	TBD	TBD	2200
SRB 670.xx.2.100.E	110	2 - 2 1/8	29.9	26.4	49.5	4.9	34.3	19.8	71.7	80.4	TBD	TBD	4930

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.






SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



Standard Reeve Crane Blocks

3 sheaves

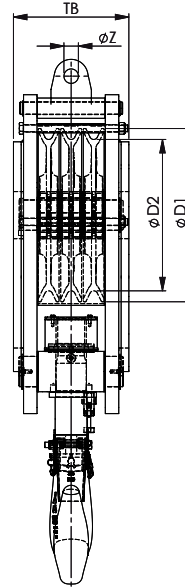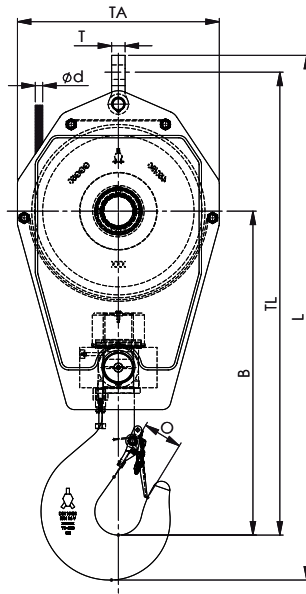

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Dimensions (inch)										Weight
	UStons	inch	øD1	øD2	B	O	TA	TB	TL	L	T	øZ	lbs
SRB 260.xx.3.25.E	27.5	7/16 - 5/8	11.8	10.2	25.9	3.1	15.7	10.2	37.5	42.8	TBD	TBD	465
SRB 285.xx.3.29.E	32	1/2 - 3/4	12.8	11.2	26.3	3.1	15.7	10.6	38.5	43.8	TBD	TBD	465
SRB 320.xx.3.29.E	32	9/16 - 3/4	14.4	12.6	28.1	3.1	17.7	9.4	41.3	46.6	TBD	TBD	495
SRB 355.xx.3.32.E	35	5/16 - 7/8	16.1	14.0	29.6	3.5	19.7	10.3	43.0	49.0	TBD	TBD	715
SRB 360.xx.3.40.E	44	5/8 - 7/8	16.1	14.2	33.0	3.9	19.7	14.3	46.4	52.8	TBD	TBD	1000
SRB 400.xx.3.40.E	44	5/8 - 1	18.1	15.7	34.0	3.9	22.4	13.9	49.0	55.6	TBD	TBD	1100
SRB 400.xx.3.50.E	55	5/8 - 1	18.1	15.7	34.0	4.4	22.4	13.9	49.0	56.1	TBD	TBD	1100
SRB 400.xx.3.50.E	55	5/8 - 1	18.1	15.7	34.0	4.4	22.4	14.7	49.0	56.1	TBD	TBD	1190
SRB 450.xx.3.64.E	70	3/4 - 1 1/8	20.3	17.7	37.9	4.4	23.6	13.5	54.2	61.3	TBD	TBD	1495
SRB 450.xx.3.64.E	70	3/4 - 1 1/8	20.3	17.7	37.9	4.4	23.6	15.1	54.2	61.7	TBD	TBD	1695
SRB 450.xx.3.70.E	77	3/4 - 1 1/8	20.3	17.7	38.3	4.4	23.6	11.1	55.0	62.9	TBD	TBD	1650
SRB 528.xx.3.82.E	90	7/8 - 1 1/4	23.4	20.8	44.6	4.9	28.0	18.2	63.5	71.7	TBD	TBD	2500
SRB 528.xx.3.100.E	110	7/8 - 1 1/4	23.4	20.8	48.1	5.5	28.0	18.2	66.3	75.3	TBD	TBD	2800
SRB 670.xx.3.125.E	137.5	1 - 1 3/8	29.9	26.4	53.3	5.5	34.3	25.3	75.5	85.0	TBD	TBD	6380

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.





SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



4 sheaves

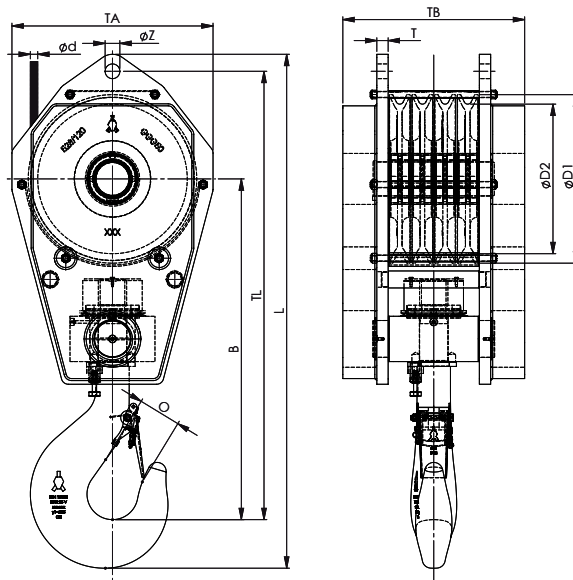

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Dimensions (inch)										Weight
	UStons	inch	øD1	øD2	B	O	TA	TB	TL	L	T	øZ	lbs
SRB 285.xx.4.35.E	38.5	½ - ¾	12.8	11.2	660	3.5	400	346	920	1026	TBD	TBD	570
SRB 355.xx.4.50.E	55	⅝ - 7⁄8	16.1	14.0	839	4.4	500	392	1114	1291	TBD	TBD	1045
SRB 528.xx.4.55.E	60	7⁄8 - 1 ¼	23.5	20.8	979	3.9	710	550	1359	1538	TBD	TBD	2600
SRB 400.xx.4.64.E	70	⅝ - 1	18.1	15.7	905	4.4	570	373	1200	1382	TBD	TBD	1155
SRB 450.xx.4.64.E	70	¾ - 1 ⅝	20.3	17.7	965	4.4	600	413	1321	1503	TBD	TBD	1595
SRB 528.xx.4.70.E	77	7⁄8 - 1 ¼	23.5	20.8	1025	4.4	710	532	1405	1599	TBD	TBD	2850
SRB 450.xx.4.82.E	90	¾ - 1 ⅝	20.3	17.7	1047	4.9	600	493	1310	1520	TBD	TBD	2110
SRB 450.xx.4.82.E	90	¾ - 1 ⅝	20.3	17.7	1047	4.9	600	493	1310	1520	TBD	TBD	2110
SRB 450.xx.4.100.E	110	¾ - 1 ⅝	20.3	17.7	1188	5.5	600	602	1528	1750	TBD	TBD	3200
SRB 528.xx.4.105.E	115.5	7⁄8 - 1 ¼	23.4	20.8	1223	5.5	710	512	1593	1823	TBD	TBD	3900
SRB 670.xx.4.160.E	176	1 - 1 ⅝	29.9	26.4	1541	7.1	870	682	2106	2388	TBD	TBD	6930
SRB 710.xx.4.105.E	115.5	1 ⅝ - 1 ½	31.5	28.0	1353	5.5	900	442	1878	2145	TBD	TBD	3000

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.





SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

8125 Saran Dr. • Playa del Rey, CA 90293
Phone: 310.448.5444 • Fax: 310.448.5446
sales@awrrinc.com
www.AssociatedWireRope.com



Standard Reeve Crane Blocks

5 sheaves

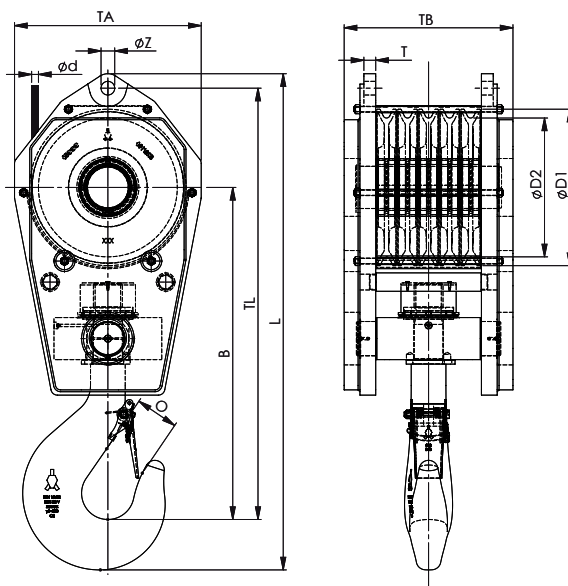

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Dimensions (inch)										Weight
	UStons	inch	øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 355.xx.5.55.E	60	5/16 - 7/8	16.1	14.0	33.0	4.4	19.7	17.4	44.6	51.4	TBD	TBD	1100
SRB 360.xx.5.64.E	70	5/8 - 7/8	16.1	14.2	39.1	4.4	19.7	17.2	47.2	54.1	TBD	TBD	1320
SRB 360.xx.5.80.E	88	5/8 - 7/8	16.1	14.2	39.1	4.9	19.7	21.2	50.5	58.1	TBD	TBD	1805
SRB 400.xx.5.80.E	88	5/8 - 1	18.1	15.7	40.7	4.9	22.4	21.3	53.7	61.6	TBD	TBD	1835
SRB 400.xx.5.73.E	80	5/8 - 1	18.1	15.7	37.6	4.4	22.4	19.8	49.6	56.7	TBD	TBD	1650
SRB 400.xx.5.82.E	90	5/8 - 1	18.1	15.7	40.7	4.9	22.4	21.3	53.7	61.6	TBD	TBD	1800
SRB 450.xx.5.82.E	90	3/4 - 1 1/8	20.3	17.7	42.2	4.9	23.6	21.9	56.3	64.2	TBD	TBD	2250
SRB 450.xx.5.100.E	110	3/4 - 1 1/8	20.3	17.7	44.4	5.5	23.6	21.9	58.5	67.6	TBD	TBD	2500
SRB 528.xx.5.125.E	137.5	7/8 - 1 1/4	23.4	20.8	49.7	6.3	28.0	25.3	66.8	76.6	TBD	TBD	3500
SRB 528.xx.5.137.5.E	150	7/8 - 1 1/4	23.4	20.8	52.5	6.3	28.0	21.7	50.1	77.8	TBD	TBD	3500
SRB 528.xx.5.160.E	176	7/8 - 1 1/4	23.4	20.8	55.4	7.1	28.0	22.1	70.7	81.8	TBD	TBD	3640
SRB 670.xx.5.200.E	220	1 - 1 3/8	29.9	26.4	64.6	7.9	34.3	31.6	83.9	95.9	TBD	TBD	7830

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com

