


CLOSED BODY SWIVEL

TYPE SW1

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -4°F up to +392°F
 Standard certification : Certificate of Conformity

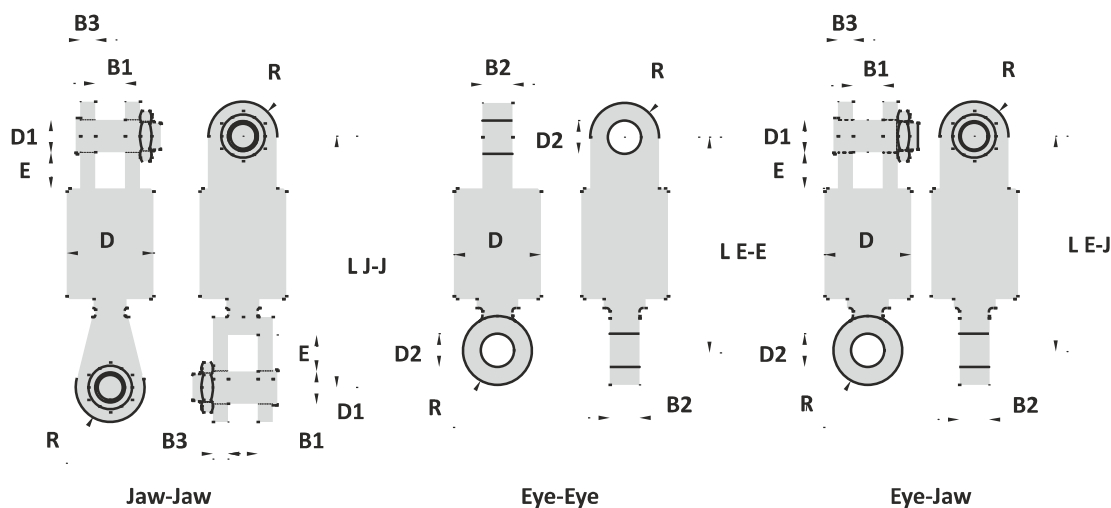

Art. No. Jaw-Jaw	Art. No. Eye-Eye	Art. No. Eye-Jaw	WLL	B1	B2	B3	D1	D2	D	E	L J-J	L E-E	L E-J	R	Weight J-J lbs	Weight E-E lbs	Weight E-J lbs
			ton	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch			
40110017	40115017	40119017	17	2 1/16	2 3/8	1 3/32	2 1/32	2 1/16	6 11/16	3 29/32	18 29/32	16 1/8	16 1/8	2 3/4	128	97	119
40110025	40115025	40119025	25	3	2 3/4	1 3/16	2 3/4	2 29/32	7 15/32	4 1/8	22 1/4	17 23/32	18 29/32	2 3/4	183	141	170
40110035	40115035	40119035	35	3 3/16	3 3/8	1 1/8	3 3/8	3 3/8	9 27/32	5 1/8	27 1/2	21 1/4	23 1/2	3 1/2	368	291	342
40110055	40115055	40119055	55	4 3/16	3 15/16	1 31/32	3 15/16	4 1/8	10 5/8	4 15/16	31 1/2	27 1/2	27 3/4	4 1/8	604	470	560
40110070	40115070	40119070	70	4 3/8	3 15/16	2 5/32	4 1/4	4 3/8	11 13/32	4 3/8	31 1/2	29 3/8	29 3/8	4 11/32	712	556	606
40110085	40115085	40119085	85	5 1/8	4 29/32	2 19/16	5	5 1/8	13 29/32	3 7/8	33 1/8	32 11/16	32 11/16	5 1/8	1166	891	988
40110120	40115120	40119120	120	6 3/32	5 1/2	3 3/16	6	6 3/32	16 15/16	4 1/2	35 3/32	36 3/32	34 29/32	6 11/16	1876	1462	1618
40110150	40115150	40119150	150	6 11/16	6 3/8	3 19/32	7	7 1/8	18 1/2	4 3/4	39 1/2	37 13/16	36 19/32	7 13/32	2579	1973	2183
40110200	40115200	40119200	200	6 7/8	6 11/16	4 5/16	7 19/32	7 19/32	20 7/8	5	48 7/16	47 7/8	48 3/32	8 29/32	3805	2698	3139
40110250	40115250	40119250	250	7 19/32	7 15/32	4 23/32	9 27/32	9 31/32	23 3/8	5 3/8	52 3/4	54 3/8	53 3/8	10 1/4	5703	3829	4608
40110300	40115300	40119300	300	9 29/32	7 15/32	6 7/8	11 19/32	11 19/32	29 3/32	5 7/8	58 1/4	62 3/8	60 3/4	11 13/16	9524	6105	7579

Tolerance: ± 5%, machined parts ± 1/32 inch

GN ROPE FITTINGS

North American Stocking Distributor

8125 Saran Dr. • Playa del Rey, CA 90293

Phone: 310.448.5444 • Fax: 310.448.5446

sales@awrrinc.com


www.AssociatedWireRope.com



CLOSED BODY SWIVEL

TYPE SW1

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

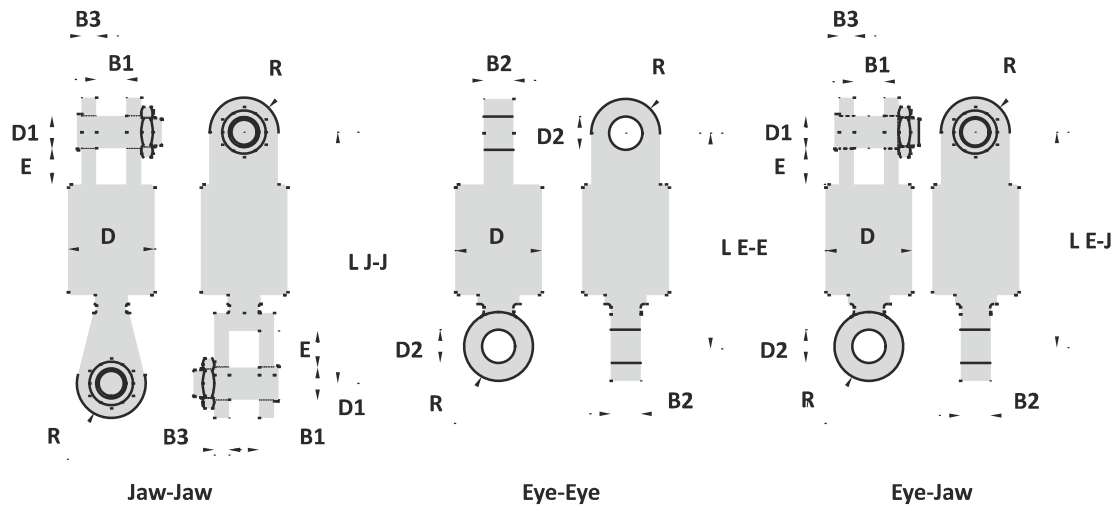

Art. No. Jaw-Jaw	Art. No. Eye-Eye	Art. No. Eye-Jaw	WLL ton	B1 mm	B2 mm	B3 mm	D1 mm	D2 mm	D mm	E mm	L J-J mm	L E-E mm	L E-J mm	R mm	Weight J-J kg	Weight E-E kg	Weight E-J kg
40110017	40115017	40119017	17	65	55	28	63	65	170	99	480	410	410	70	58	44	54
40110025	40115025	40119025	25	76	70	30	70	72	190	110	565	450	480	70	83	64	77
40110035	40115035	40119035	35	90	80	40	80	82	250	135	690	540	585	85	167	132	155
40110055	40115055	40119055	55	110	100	50	100	103	270	125	800	690	705	105	274	213	254
40110070	40115070	40119070	70	110	100	55	108	111	290	117	796	752	752	115	323	252	275
40110085	40115085	40119085	85	130	120	75	127	130	350	87	840	830	815	135	529	404	448
40110120	40115120	40119120	120	155	140	90	152	155	430	114	893	920	885	170	851	663	734
40110150	40115150	40119150	150	170	160	100	178	181	470	121	1003	960	925	190	1170	895	990
40110200	40115200	40119200	200	175	170	110	190	193	530	127	1230	1210	1220	220	1726	1224	1424
40110250	40115250	40119250	250	190	190	120	250	253	600	132	1340	1380	1360	260	2587	1737	2090
40110300	40115300	40119300	300	250	190	175	290	293	750	138	1480	1580	1530	300	4320	2769	3438

Tolerance: ± 5%, machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS