CR-D ROPE SWIVEL

TYPE SW5


Material : Alloy steel quenched and tempered


Safety factor : 5 times Finish : Painted

Temperature range : -4°F up to +392°F Standard certification : Certificate of Conformity

Suitable for use with common studless links and endlinks Non-standard sizes or custom products available on request



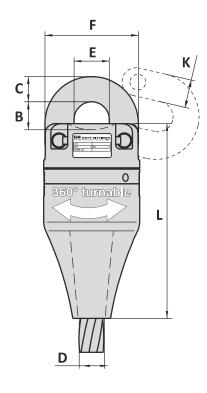



Art. No.	Type	Wire dia	Suitable	WLL	MBL	В	С	D	Е	F	G	Н	K	L	Weight
	No.	inch	chain	ton	ton	inch	inch	inch	inch	inch	inch	inch	inch	inch	lbs
47050250	722	2 - 2 1/4	2	50	250	2 3/4	2 3/8	2 1/16	3 1/16	8 ¾	1 ²⁵ / ₃₂	9 3/8	2 23/32	18 1/32	225
47050600	728	3 - 3 1/4	3	120	600	4 23/32	3 15/16	3 3/8	4 13/32	13 ¾	2 3/4	14 %	4 ½	26 11/16	851
47050800	730	3 ½ - 3 ¾	3 ½	160	800	6	4 23/32	3 29/32	5 ½	15 ¾	3 1/32	16 ¹ /⁄ ₃₂	5 1/8	30 ⅓6	1237

Tolerance: Forged parts \pm 5%, machined parts \pm 1/32 inch



GN ROPE FITTINGS

North American Stocking Distributor



TYPE SW5

CR-D ROPE SWIVEL


Material : Alloy steel quenched and tempered

Safety factor : 5 times Finish : Painted

Temperature range : -20°C up to +200°C Standard certification: Certificate of Conformity

Suitable for use with common studless links and endlinks Non-standard sizes or custom products available on request



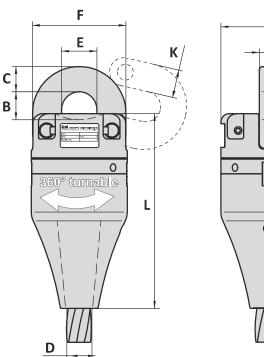

H
G
0 0
•

Α	Art. No.	Type	Wire dia	Suitable	WLL	MBL	В	С	D	Е	F	G	Н	K	L	Weight
		No.	inch	chain	ton	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
47	7050250	722	2 - 2 1/4	2	50	250	70	60	59	84	222	45	238	69	463	102
47	7050600	728	3 - 3 1/4	3	120	600	120	100	86	112	340	70	378	114	678	386
47	7050800	730	3 ½ - 3 ¾	3 ½	160	800	152	120	99	140	400	80	420	130	770	561

Tolerance: Forged parts ± 5%, machined parts ± 1 mm



North American Stocking Distributor



