


HEAVY DUTY TURNBUCKLE

TYPE T2

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -4°F up to +392°F
 Standard certification : Certificate of Conformity

*This type of rigging screws meets the requirements as laid down in the Dutch, British, American and other dock regulations.
 On request deliverable with 2 securing nuts or plates.
 Custom designed screws can be constructed in any size and capacity.
 Rigging screws are supplied with trapezium thread.*

Non-standard sizes or custom products available on request

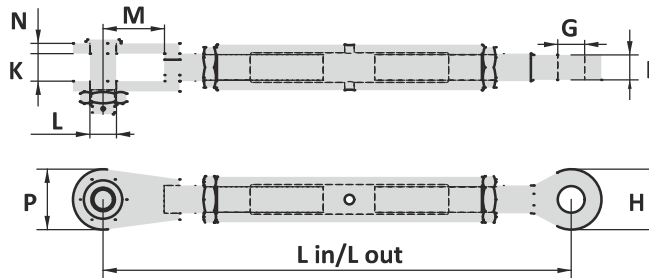

WLL ton	Art. No Jaw-Jaw	L in inch	L out inch	Art. No Eye-Eye	L in inch	L out inch	Art. No Jaw-Eye	L in inch	L out inch
13.5	42013000	36 ¹ / ₁₆	49 ⁷ / ₈	42013001	33 ¹ / ₁₆	45 ⁷ / ₈	42013002	35 ¹ / ₂	47 ⁷ / ₈
17	42017000	39 ³ / ₄	53 ⁹ / ₁₆	42017001	36 ³ / ₃₂	50	42017002	38	51 ² / ₃₂
25	42025000	42 ² / ₃₂	55 ² / ₃₂	42025001	38 ³ / ₈	51 ³ / ₈	42025002	40 ³ / ₁₆	53 ³ / ₁₆
30	42030000	45 ¹ / ₁₆	60 ¹ / ₄	42030001	40 ³ / ₃₂	54 ² / ₃₂	42030002	42 ² / ₃₂	57 ¹ / ₃₂
35	42035000	49 ¹ / ₃₂	64 ³ / ₃₂	42035001	43 ¹ / ₁₆	59 ¹ / ₁₆	42035002	46 ¹ / ₄	62
45	42045000	51 ³ / ₁₆	70 ¹ / ₁₆	42045001	46 ¹ / ₁₆	64 ³ / ₃₂	42045002	48 ³ / ₈	67 ¹ / ₂
55	42055000	54 ³ / ₁₆	74 ¹ / ₃₂	42055001	50	70 ¹ / ₁₆	42055002	52 ¹ / ₃₂	72 ¹ / ₄
70	42070000	58 ¹ / ₄	79 ² / ₃₂	42070001	54 ² / ₃₂	76 ³ / ₈	42070002	56 ¹ / ₂	78 ³ / ₃₂
85	42085000	61 ¹ / ₈	86 ¹ / ₈	42085001	59 ² / ₃₂	84 ² / ₃₂	42085002	60 ³ / ₈	85 ³ / ₈
100	42100000	64 ¹ / ₈	92 ² / ₃₂	42100001	63	91 ¹ / ₄	42100002	63 ¹ / ₃₂	92 ¹ / ₁₆
120	42120000	68 ¹ / ₁₆	92 ¹ / ₂	42120001	68 ³ / ₁₆	91 ¹ / ₄	42120002	68 ¹ / ₂	91 ¹ / ₁₆
160	42160000	73 ³ / ₈	97 ¹ / ₄	42160001	73 ¹ / ₃₂	96 ² / ₃₂	42160002	73 ¹ / ₁₆	97 ¹ / ₁₆
200	42200000	79 ¹ / ₃₂	103 ¹ / ₁₆	42200001	78 ³ / ₄	103 ¹ / ₃₂	42200002	79 ³ / ₈	103 ³ / ₁₆
250	42250000	85 ¹ / ₁₆	111 ¹ / ₁₆	42250001	87	113 ³ / ₈	42250002	86 ¹ / ₃₂	112 ¹ / ₃₂

WLL ton	Thread	K inch	N inch	M inch	L inch	P inch	F inch	H inch	G inch	Weight lbs
13.5	Tr 55x8	2 ⁵ / ₃₂	2 ² / ₃₂	4 ¹ / ₁₆	2	4 ² / ₃₂	1 ³ / ₃₂	4 ² / ₃₂	2 ³ / ₃₂	115
17	Tr 65x8	2 ¹ / ₁₆	1 ¹ / ₂	5 ¹ / ₈	2 ¹ / ₃₂	5 ¹ / ₂	2 ¹ / ₃₂	5 ¹ / ₂	2 ¹ / ₁₆	152
25	Tr 70x8	3	1 ³ / ₁₆	5 ² / ₃₂	2 ³ / ₄	5 ¹ / ₂	2 ³ / ₄	5 ¹ / ₂	2 ² / ₃₂	187
30	Tr 75x8	3 ³ / ₃₂	1 ¹ / ₈	6 ¹ / ₁₆	2 ² / ₃₂	5 ² / ₃₂	2 ³ / ₄	5 ² / ₃₂	2 ² / ₃₂	220
35	Tr 80x8	3 ¹ / ₁₆	1 ¹ / ₈	6 ¹ / ₈	3 ¹ / ₃₂	6 ¹ / ₁₆	3 ¹ / ₃₂	6 ¹ / ₁₆	3 ¹ / ₃₂	309
45	Tr 90x8	3 ¹ / ₁₆	1 ² / ₃₂	6 ¹ / ₈	3 ¹ / ₁₆	7 ¹ / ₃₂	3 ¹ / ₁₆	7 ¹ / ₃₂	3 ² / ₃₂	397
55	Tr 100x8	4 ¹ / ₁₆	1 ³ / ₃₂	6 ¹ / ₈	3 ¹ / ₁₆	8 ¹ / ₄	3 ¹ / ₁₆	8 ¹ / ₄	4 ¹ / ₁₆	529
70	Tr 110x8	4 ¹ / ₁₆	2 ¹ / ₃₂	6 ¹ / ₈	4 ¹ / ₄	9 ¹ / ₁₆	3 ¹ / ₁₆	9 ¹ / ₁₆	4 ³ / ₈	750
85	Tr 120x8	5 ¹ / ₈	2 ¹ / ₁₆	6 ¹ / ₈	5	10 ¹ / ₈	4 ¹ / ₁₆	10 ¹ / ₈	5 ¹ / ₈	926
100	Tr 130x8	5 ¹ / ₂	3 ¹ / ₁₆	6 ¹ / ₈	5 ¹ / ₂	11 ¹ / ₃₂	4 ¹ / ₁₆	11 ¹ / ₃₂	5 ¹ / ₈	1124
120	Tr 140x8	6 ¹ / ₃₂	3 ¹ / ₈	7 ¹ / ₃₂	6	13 ¹ / ₈	5 ¹ / ₂	13 ¹ / ₈	6 ¹ / ₃₂	1323
160	Tr 160x8	6 ¹ / ₁₆	3 ¹ / ₁₆	8 ¹ / ₄	7	14 ³ / ₃₂	6 ¹ / ₁₆	14 ³ / ₃₂	7 ¹ / ₈	1543
200	Tr 180x8	7 ¹ / ₃₂	4 ¹ / ₈	9 ² / ₃₂	7 ¹ / ₃₂	15 ³ / ₄	6 ¹ / ₁₆	15 ³ / ₄	7 ¹ / ₃₂	2116
250	Tr 200x8	8 ¹ / ₄	4 ² / ₃₂	11 ¹ / ₃₂	9 ² / ₃₂	20 ¹ / ₃₂	7 ¹ / ₃₂	20 ¹ / ₃₂	9 ³ / ₃₂	2469

Tolerance: Forged parts ± 5%, machined parts ± 1/32 inch

GN ROPE FITTINGS

North American Stocking Distributor

8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446

sales@awrrinc.com

www.AssociatedWireRope.com




HEAVY DUTY TURNBUCKLE

TYPE T2

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

*This type of rigging screws meets the requirements as laid down in the Dutch, British, American and other dock regulations.
 On request deliverable with 2 securing nuts or plates.
 Custom designed screws can be constructed in any size and capacity.
 Rigging screws are supplied with trapezium thread.*

Non-standard sizes or custom products available on request

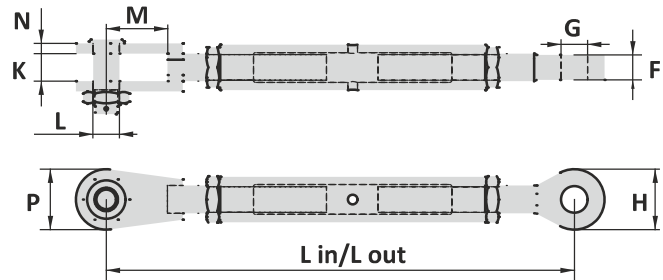

WLL ton	Art. No Jaw-Jaw	L in mm	L out mm	Art. No Eye-Eye	L in mm	L out mm	Art. No Jaw-Eye	L in mm	L out mm
13.5	42013000	935	1260	42013001	840	1165	42013002	890	1215
17	42017000	1010	1360	42017001	920	1270	42017002	965	1315
25	42025000	1085	1415	42025001	975	1305	42025002	1030	1360
30	42030000	1160	1530	42030001	1020	1390	42030002	1090	1460
35	42035000	1250	1650	42035001	1100	1500	42035002	1175	1575
45	42045000	1300	1780	42045001	1170	1650	42045002	1235	1715
55	42055000	1380	1890	42055001	1270	1780	42055002	1325	1835
70	42070000	1480	2025	42070001	1390	1940	42070002	1435	1985
85	42085000	1565	2200	42085001	1515	2150	42085002	1540	2175
100	42100000	1630	2360	42100001	1600	2330	42100002	1615	2345
120	42120000	1745	2340	42120001	1735	2330	42120002	1740	2335
160	42160000	1870	2470	42160001	1860	2460	42160002	1865	2465
200	42200000	2020	2640	42200001	2000	2620	42200002	2010	2630
250	42250000	2170	2840	42250001	2210	2880	42250002	2190	2860

WLL ton	Thread	K mm	N mm	M mm	L mm	P mm	F mm	H mm	G mm	Weight kg
13.5	Tr 55x8	55	20	122	51	120	50	120	53	52
17	Tr 65x8	65	28	130	63	140	55	140	65	69
25	Tr 70x8	76	30	145	70	140	70	140	72	85
30	Tr 75x8	80	35	160	72	150	70	150	74	100
35	Tr 80x8	90	40	175	80	170	80	170	82	140
45	Tr 90x8	100	45	175	90	190	90	190	93	180
55	Tr 100x8	110	50	175	100	210	100	210	103	240
70	Tr 110x8	110	55	175	108	230	100	230	111	340
85	Tr 120x8	130	75	175	127	270	125	270	130	420
100	Tr 130x8	140	90	175	140	290	125	290	143	510
120	Tr 140x8	155	90	190	152	340	140	340	155	600
160	Tr 160x8	170	100	210	178	380	160	380	181	700
200	Tr 180x8	190	110	250	190	400	170	400	193	960
250	Tr 200x8	210	120	280	250	520	190	520	253	1120

Tolerance: Forged parts $\pm 5\%$, machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS