





Stainless Steel



Reinforced Ring

1 1/4" x 10"
1 1/2" x 10"



Bosh Ring

A-320
A-315



Ring type Stirrup

5/8" to 1 1/4"



Pear Ring Type

with reel and cartridge
1 1/4" and 1 3/8"



Pear Ring type

with reel and cartridge
1 1/4" and 1 3/8"



Circular Ring

5/8" to 1 1/4"

Forged



- Heat treatment.
- Surface flat contact.
- Extends the cable life.
- Wear by abrasion 50% Less Than cast ring.

Swivel with ball bearing




Size	Working Load Limit (lbs.)	Diameter Wire	Weight (lbs.)
5/8	4400	5/8	1.3
3/4	6600	3/4	2
7/8	11000	7/8	2.8
1	16500	1	4.3

- High tensile strength and wear by corrosion.
- High speed of rotation.
- Angular contact bearings or bronze bushing SAE62.



Molas

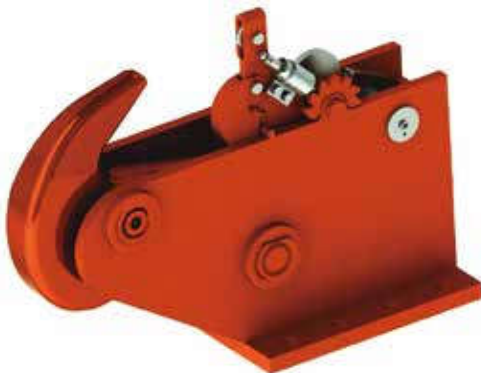

Mola Tuna

#5 - 39600 Lbs.

- Blocks built to 4:1 Design Factor.
- Larger sizes available upon request.
- The dimensions in this table are indicative only.
- Blocks shown here are standard models.
- Custom models available.

See our warnings & application instructions



Mola standard steel

#1 - 11000 Lbs.

#2 - 17600 Lbs.

#3 - 26400 Lbs.

#4 - 33000 Lbs.