
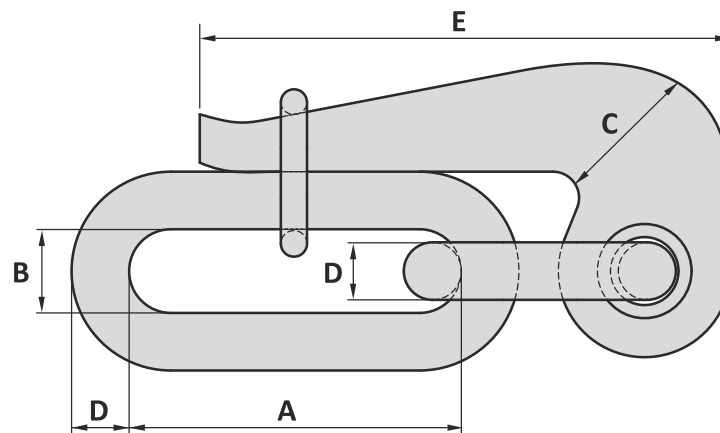


SLIPHOOK

TYPE HK4

Material : Low alloy steel
 Safety factor : 4 times
 Finish : Galvanised
 Temperature range : -4°F up to +392°F
 Standard certification : Certificate of Conformity

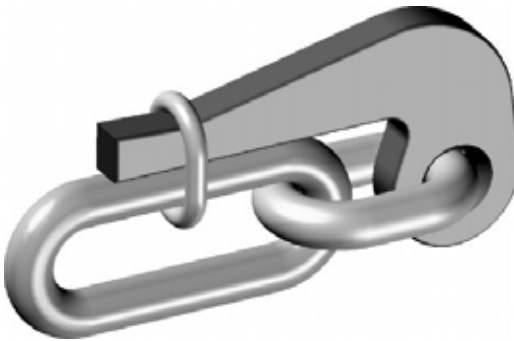


Art. No.	WLL ton	D inch	A inch	B inch	C inch	E inch	Weight lbs
44100000	0.4	$1\frac{1}{32}$	$3\frac{1}{2}$	$\frac{5}{8}$	$1\frac{1}{16}$	$4\frac{1}{16}$	1.4
44120000	0.75	$1\frac{15}{32}$	4	$\frac{7}{8}$	$1\frac{3}{32}$	$6\frac{1}{2}$	2.1
44160000	1.25	$\frac{3}{8}$	$5\frac{1}{8}$	$2\frac{9}{32}$	$1\frac{21}{32}$	$7\frac{3}{32}$	3.3
44200000	2	$\frac{7}{8}$	$6\frac{11}{16}$	$1\frac{11}{32}$	$1\frac{13}{16}$	$9\frac{1}{16}$	7.7
44250000	5	1	$7\frac{7}{8}$	$1\frac{1}{2}$	$2\frac{19}{32}$	$11\frac{1}{32}$	17
44350000	9	$1\frac{1}{4}$	$10\frac{1}{4}$	$2\frac{9}{32}$	$3\frac{15}{32}$	$14\frac{3}{16}$	31

Tolerance: Forged parts $\pm 5\%$, machined parts $\pm \frac{1}{32}$ inch

GN ROPE FITTINGS

North American Stocking Distributor





8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



SLIPHOOK

TYPE HK4

Material : Low alloy steel
 Safety factor : 4 times
 Finish : Galvanised
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

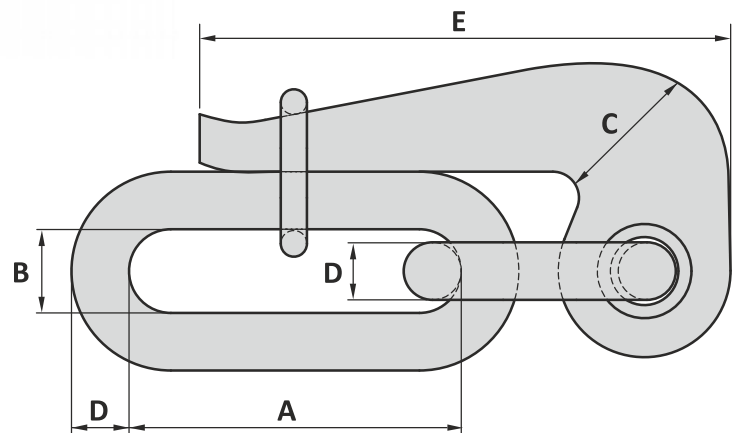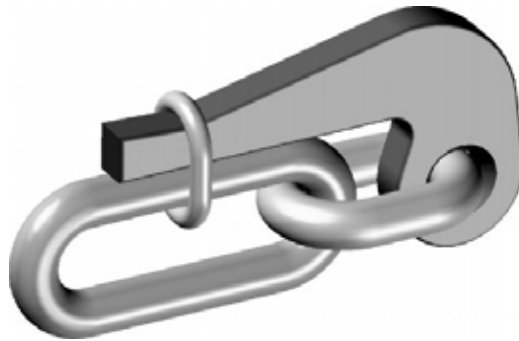


Art. No.	WLL ton	D mm	A mm	B mm	C mm	E mm	Weight kg
44100000	0.4	9	89	16	27	125	0.62
44120000	0.75	12	102	22	28	165	0.95
44160000	1.25	16	130	23	42	180	1.5
44200000	2	22	170	34	46	230	3.5
44250000	5	25	200	38	66	280	7.6
44350000	9	32	260	58	88	360	14

Tolerance: Forged parts $\pm 5\%$, machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS