


MASTER LINK

TYPE SC1

Material : Grade 80
 Safety factor : ≤ 12914000 - 400 ton, 5 times
 > 12916000 - 400 ton, 4 times
 Standards : Generally according to EN 1677-4
 Finish : Painted
 Temperature range : ≤ 12914000 - 400 ton, -4°F up to +392°F
 > 12916000 - 400 ton, -40°F up to +392°F; Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

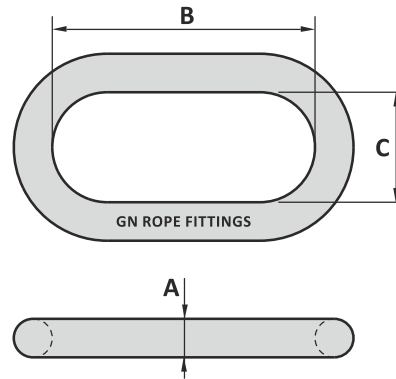


Can be assembled with our range of K2(-B), K3(-B) and K12 thimbles on request

Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	Weight lbs
12220000	5	25	$\frac{7}{8}$	$6\frac{5}{16}$	$3\frac{9}{16}$	3.3
12260000	8	40	$1\frac{1}{2}$	$7\frac{7}{32}$	$3\frac{15}{16}$	5.1
12320000	10	50	$1\frac{1}{4}$	$7\frac{7}{8}$	$4\frac{5}{16}$	8.6
12360000	16	80	$1\frac{13}{32}$	$10\frac{1}{4}$	$5\frac{1}{2}$	14
12450000	26	130	$1\frac{25}{32}$	$13\frac{3}{8}$	$7\frac{3}{32}$	29
12510000	36	180	2	$13\frac{25}{32}$	$7\frac{15}{32}$	37
12570000	47	235	$2\frac{1}{4}$	$15\frac{3}{4}$	$7\frac{7}{8}$	53
12630000	58	290	$2\frac{15}{32}$	$16\frac{15}{16}$	$8\frac{21}{32}$	71
12720000	84	420	$2\frac{27}{32}$	$18\frac{1}{8}$	$9\frac{27}{32}$	99
12800000	105	525	$3\frac{5}{32}$	$17\frac{23}{32}$	$9\frac{27}{32}$	123
12900000	131	655	$3\frac{3}{16}$	$18\frac{1}{8}$	$11\frac{13}{16}$	170
12910000	157	785	$3\frac{15}{16}$	$19\frac{11}{16}$	$11\frac{13}{16}$	223
12912500	250	1250	$4\frac{1}{32}$	$23\frac{3}{8}$	$15\frac{3}{4}$	359
12912510	300	1500	$4\frac{17}{32}$	$23\frac{3}{8}$	$11\frac{13}{16}$	340
12913500	400	2000	$4\frac{17}{32}$	$27\frac{7}{16}$	$9\frac{27}{32}$	366
12914000	400	2000	$4\frac{17}{32}$	$19\frac{9}{32}$	$9\frac{27}{32}$	291
12916000	400	1600	$6\frac{3}{32}$	$31\frac{1}{2}$	$15\frac{3}{4}$	1058
12917000	500	2000	$6\frac{7}{8}$	$31\frac{1}{2}$	$15\frac{3}{4}$	1329
12918000	600	2400	$7\frac{11}{16}$	$31\frac{1}{2}$	$15\frac{3}{4}$	1614
12918100	700	2800	$7\frac{7}{8}$	$33\frac{15}{32}$	$15\frac{3}{4}$	1753
12918200	800	3200	$8\frac{1}{4}$	$33\frac{15}{32}$	$15\frac{3}{4}$	1942
12918300	900	3600	$9\frac{1}{16}$	$35\frac{7}{16}$	$15\frac{3}{4}$	2467
12918400	1000	4000	$9\frac{3}{16}$	$35\frac{7}{16}$	$15\frac{3}{4}$	2703
12918500	1250	5000	$10\frac{1}{4}$	$39\frac{3}{8}$	$15\frac{3}{4}$	3481
12918600	1500	6000	$10\frac{3}{8}$	$39\frac{3}{8}$	$15\frac{3}{4}$	3774

Tolerance: Forged parts $\pm 5\%$

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com




MASTER LINK

TYPE SC1

Material : Grade 80
 Safety factor : ≤ 12914000 - 400 ton, 5 times
 > 12916000 - 400 ton, 4 times
 Standards : Generally according to EN 1677-4
 Finish : Painted
 Temperature range : ≤ 12914000 - 400 ton, -20°C up to +200°C
 > 12916000 - 400 ton, -40°C up to +200°C; Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

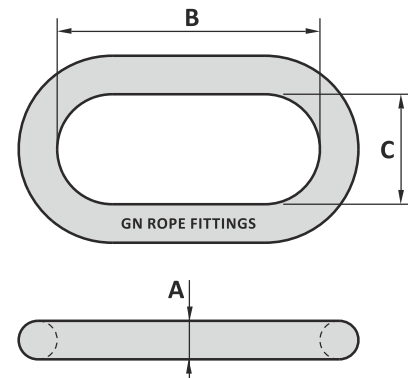


Can be assembled with our range of K2(-B), K3(-B) and K12 thimbles on request

Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	Weight kg
12220000	5	25	22	160	90	1.5
12260000	8	40	26	180	100	2.3
12320000	10	50	32	200	110	3.9
12360000	16	80	36	260	140	6.3
12450000	26	130	45	340	180	13
12510000	36	180	51	350	190	17
12570000	47	235	57	400	200	24
12630000	58	290	63	430	220	32
12720000	84	420	72	460	250	45
12800000	105	525	80	450	250	56
12900000	131	655	90	460	300	77
12910000	157	785	100	500	300	101
12912500	250	1250	115	600	400	163
12912510	300	1500	115	600	300	154
12913500	400	2000	115	700	250	166
12914000	400	2000	115	490	250	132
12916000	400	1600	155	800	400	480
12917000	500	2000	175	800	400	603
12918000	600	2400	195	800	400	732
12918100	700	2800	200	850	400	795
12918200	800	3200	210	850	400	881
12918300	900	3600	230	900	400	1119
12918400	1000	4000	240	900	400	1226
12918500	1250	5000	260	1000	400	1579
12918600	1500	6000	270	1000	400	1712

Tolerance: Forged parts ± 5%

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS