


Tailgrip Open Wedge Sockets with bolt and nut

Quenched and tempered cast steel

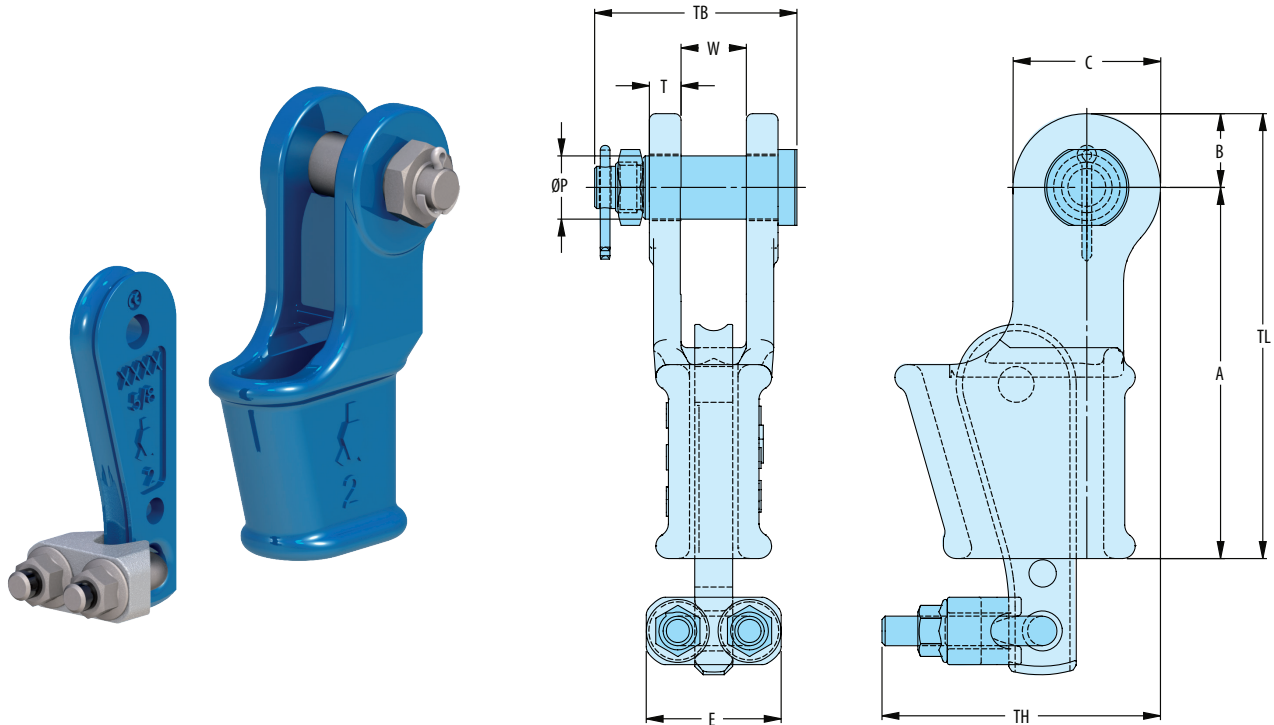

Model nr.	MBL (UStons)	for wire ϕ		Dimensions (inch)										Weight (lbs)
		mm	inch	A	B	C	E	ϕP	T	TH	TL	TB	W	
OWS-TG 0.5 B	13	9-10	$\frac{3}{8}$	5 $\frac{1}{16}$	$\frac{7}{8}$	1 $\frac{13}{16}$	1 $\frac{9}{16}$	$\frac{13}{16}$	$\frac{7}{16}$	3	6 $\frac{1}{2}$	2 $\frac{15}{16}$	$\frac{13}{16}$	4,2
OWS-TG 1 B	22	11-13	$\frac{1}{2}$	5 $\frac{3}{4}$	1 $\frac{1}{8}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	1	$\frac{1}{2}$	4	6 $\frac{7}{8}$	3 $\frac{1}{8}$	1	5,3
OWS-TG 2 B	28	14-16	$\frac{5}{8}$	6 $\frac{15}{16}$	1 $\frac{3}{8}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	1 $\frac{3}{16}$	$\frac{9}{16}$	4 $\frac{15}{16}$	8 $\frac{5}{16}$	3 $\frac{3}{4}$	1 $\frac{1}{4}$	11
OWS-TG 3 B	44	18-19	$\frac{3}{4}$	8 $\frac{7}{8}$	1 $\frac{1}{16}$	3 $\frac{1}{8}$	2 $\frac{5}{8}$	1 $\frac{3}{8}$	$\frac{5}{8}$	5 $\frac{5}{8}$	9 $\frac{13}{16}$	4 $\frac{3}{16}$	1 $\frac{1}{2}$	17,6
OWS-TG 4 B	61	20-22	$\frac{7}{8}$	9 $\frac{9}{16}$	1 $\frac{7}{8}$	3 $\frac{3}{4}$	3	1 $\frac{5}{8}$	$\frac{3}{4}$	6 $\frac{3}{4}$	11 $\frac{1}{4}$	4 $\frac{13}{16}$	1 $\frac{3}{4}$	24,2
OWS-TG 5 B	83	24-26	1	10 $\frac{13}{16}$	2 $\frac{3}{16}$	4 $\frac{5}{16}$	3 $\frac{5}{16}$	2	$\frac{7}{8}$	7 $\frac{7}{8}$	13	5 $\frac{7}{16}$	2	35,2
OWS-TG 6 B	99	27-29	1 $\frac{1}{8}$	12 $\frac{3}{16}$	2 $\frac{1}{16}$	5 $\frac{1}{8}$	3 $\frac{9}{8}$	2 $\frac{1}{4}$	1	8 $\frac{1}{16}$	14 $\frac{3}{4}$	6 $\frac{5}{16}$	2 $\frac{1}{4}$	50,6
OWS-TG 7 B	121	30-32	1 $\frac{1}{4}$	13 $\frac{3}{4}$	2 $\frac{7}{8}$	5 $\frac{3}{4}$	4 $\frac{1}{4}$	2 $\frac{1}{2}$	1 $\frac{1}{8}$	9 $\frac{3}{8}$	16 $\frac{5}{8}$	6 $\frac{1}{2}$	2 $\frac{1}{2}$	74,8

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets can be provided with Declaration of compliance according EN 10204-2.1. Material certificate according EN 10204-3.1 and EC Declaration according machine directive 2006/42/EC. Meets performance requirements of API 2C.