


Material : Thimble: Mild steel
Link: Alloy steel
Finish : Painted
Temperature range : -4°F up to +392°F
Standard certification : Certificate of Conformity

Suitable for fibre rope
Special link or thimble on request

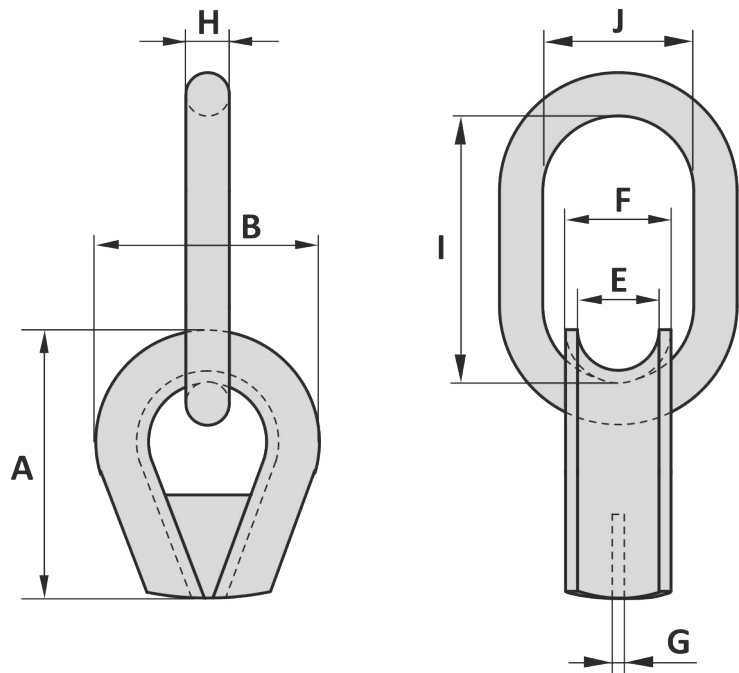

| Art. No. | Rope size inch | MBL link ton | A inch | B inch | E inch | F inch | G inch | H inch | J inch | I inch | Weight lbs |
|----------|-------------------|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------------|
| 17090045 | 9 - 10 1/2 | 104 | 15 5/32 | 11 13/16 | 3 15/16 | 5 7/8 | 25/32 | 1 25/32 | 13 3/8 | 7 3/32 | 77 |
| 17090051 | 9 - 10 1/2 | 144 | 15 5/32 | 11 13/16 | 3 15/16 | 5 7/8 | 25/32 | 2 | 13 25/32 | 7 15/32 | 86 |
| 17090057 | 9 - 10 1/2 | 188 | 15 5/32 | 11 13/16 | 3 15/16 | 5 7/8 | 25/32 | 2 1/4 | 15 3/4 | 7 7/8 | 101 |
| 17090063 | 9 - 10 1/2 | 232 | 15 5/32 | 11 13/16 | 3 15/16 | 5 7/8 | 25/32 | 2 15/32 | 16 15/16 | 8 21/32 | 119 |
| 17125057 | 12 1/2 - 13 | 188 | 18 1/2 | 12 19/32 | 4 17/32 | 6 3/32 | 25/32 | 2 1/4 | 15 3/4 | 7 7/8 | 123 |
| 17125063 | 12 1/2 - 13 | 232 | 18 1/2 | 12 19/32 | 4 17/32 | 6 3/32 | 25/32 | 2 15/32 | 16 15/16 | 8 21/32 | 141 |
| 17125072 | 12 1/2 - 13 | 336 | 18 1/2 | 12 19/32 | 4 17/32 | 6 3/32 | 25/32 | 2 27/32 | 18 1/8 | 9 27/32 | 170 |
| 17125080 | 12 1/2 - 13 | 420 | 18 1/2 | 12 19/32 | 4 17/32 | 6 3/32 | 25/32 | 3 3/32 | 17 23/32 | 9 27/32 | 194 |
| 17140063 | 14 - 15 | 232 | 22 1/16 | 15 11/32 | 5 5/16 | 6 7/8 | 1 3/16 | 2 15/32 | 16 15/16 | 8 21/32 | 172 |
| 17140072 | 14 - 15 | 336 | 22 1/16 | 15 11/32 | 5 5/16 | 6 7/8 | 1 3/16 | 2 27/32 | 18 1/8 | 9 27/32 | 201 |
| 17140080 | 14 - 15 | 420 | 22 1/16 | 15 11/32 | 5 5/16 | 6 7/8 | 1 3/16 | 3 3/32 | 17 23/32 | 9 27/32 | 225 |
| 17160072 | 16 - 18 | 336 | 22 1/16 | 15 11/32 | 6 3/32 | 7 11/16 | 1 3/16 | 2 27/32 | 18 1/8 | 9 27/32 | 205 |
| 17160080 | 16 - 18 | 420 | 22 1/16 | 15 11/32 | 6 3/32 | 7 11/16 | 1 3/16 | 3 3/32 | 17 23/32 | 9 27/32 | 229 |
| 17160090 | 16 - 18 | 524 | 22 1/16 | 15 11/32 | 6 3/32 | 7 11/16 | 1 3/16 | 2 27/32 | 18 1/8 | 11 13/16 | 276 |
| 17190080 | 19 - 20 | 420 | 23 3/8 | 17 23/32 | 7 3/32 | 8 21/32 | 1 3/16 | 3 5/32 | 17 23/32 | 9 27/32 | 256 |
| 17190090 | 19 - 20 | 524 | 23 3/8 | 17 23/32 | 7 3/32 | 8 21/32 | 1 3/16 | 3 9/16 | 18 1/8 | 11 13/16 | 302 |
| 17190100 | 19 - 20 | 628 | 23 3/8 | 17 23/32 | 7 3/32 | 8 21/32 | 1 3/16 | 3 5/32 | 19 11/16 | 11 13/16 | 355 |
| 17210090 | 20 - 21 | 524 | 24 13/32 | 18 29/32 | 8 1/16 | 9 21/32 | 1 3/16 | 3 9/16 | 18 1/8 | 11 13/16 | 326 |
| 17210100 | 20 - 21 | 628 | 24 13/32 | 18 29/32 | 8 1/16 | 9 21/32 | 1 3/16 | 3 11/16 | 19 11/16 | 11 13/16 | 379 |
| 17210115 | 20 - 21 | 1000 | 24 13/32 | 18 29/32 | 8 1/16 | 9 21/32 | 1 3/16 | 4 17/32 | 23 5/8 | 15 3/4 | 516 |

Tolerance: ± 5%

28-11-2017