


Material : Alloy steel, Grade R3/R3S/R4/R4S/R5
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -40°C up to +200°C
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Suitable for use with common studless links and end links
 Non-standard sizes or custom products available on request

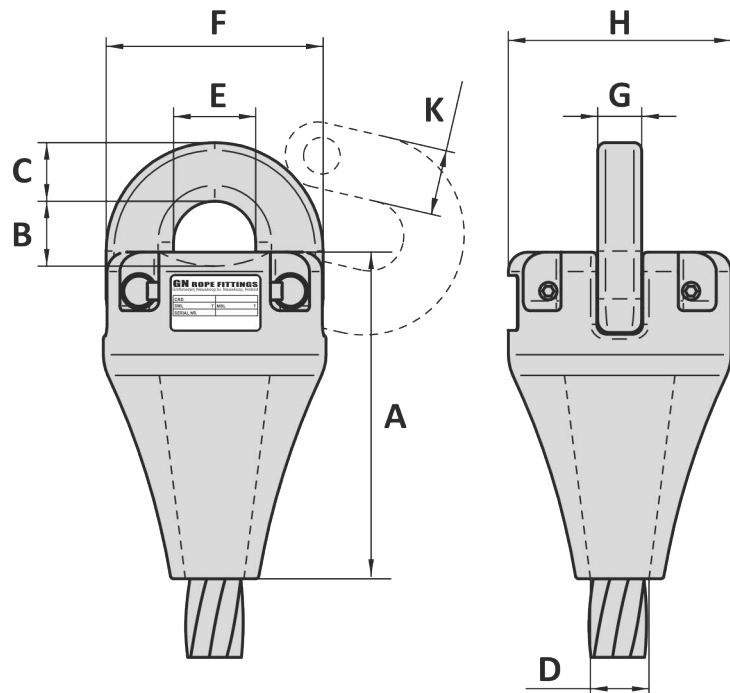

Art. No.	Type No.	Wire dia inch	Chain inch	Chain inch	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	Weight kg
47006229	622	2 - 2 1/4	2	2	250	304	70	60	59	84	222	45	238	69	47
47006289	628	3 - 3 1/4	3	3	600	465	120	100	86	112	340	70	378	114	211
47006309	630	3 1/2 - 3 3/4	3 1/2	3 1/2	800	520	152	120	99	140	400	80	420	130	304

Tolerance: ± 5%, machined parts ± 1 mm

Art. No.	Type No.	Wire dia inch	Chain inch	Chain inch	MBL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	K inch	Weight lbs
47006229	622	2 - 2 1/4	2	2	250	11 3/32	2 3/4	2 3/8	2 5/16	3 5/16	8 3/4	1 25/32	9 3/8	2 23/32	47
47006289	628	3 - 3 1/4	3	3	600	18 1/16	4 23/32	3 15/16	3 3/8	4 13/32	13 3/8	2 3/4	14 7/8	4 1/2	211
47006309	630	3 1/2 - 3 3/4	3 1/2	3 1/2	800	20 15/32	6	4 23/32	3 29/32	5 1/2	15 3/4	3 1/2	16 17/32	5 1/8	304

Tolerance: ± 5%, machined parts ± 1/32 inch

04-12-2014