


Material : Alloy steel  
 Safety factor : ≤ 12914000 - 400 ton: 5 times  
 > 12916000 - 400 ton: 4 times  
 Standards : Generally according to EN 1677-4  
 Finish : Painted  
 Temperature range : ≤ 12914000 - 400 ton, -4°F up to +392°F  
 > 12916000 - 400 ton, -40°F up to +392°F, Polar Rated  
 Standard certification : Certificate of Conformity  
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

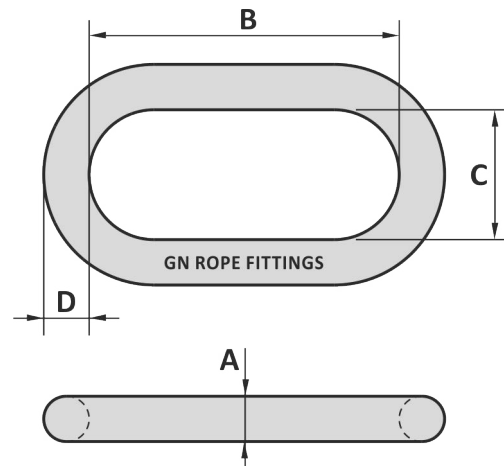

Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	Weight lbs
12220000	5	25	3/8	6 5/16	3 9/16	3/8	3.3
12260000	8	40	1 1/32	7 3/32	3 15/16	1 1/32	5.1
12320000	10	50	1 1/4	7 7/8	4 5/16	1 1/4	8.6
12360000	16	80	1 13/32	10 1/4	5 1/2	1 13/32	14
12450000	26	130	1 25/32	13 3/8	7 3/32	1 25/32	29
12510000	36	180	2	13 25/32	7 15/32	2	37
12570000	47	235	2 1/4	15 3/4	7 7/8	2 1/4	53
12630000	58	290	2 15/32	16 15/16	8 21/32	2 15/32	71
12720000	84	420	2 27/32	18 1/8	9 27/32	2 27/32	99
12800000	105	525	3 5/32	17 23/32	9 27/32	3 5/32	123
12900000	131	655	3 9/16	18 1/8	11 13/16	3 9/16	170
12910000	157	785	3 15/16	19 1/16	11 13/16	3 15/16	223
12912500	250	1250	4 17/32	23 3/8	15 3/4	4 17/32	359
12912510	300	1500	4 17/32	23 3/8	11 13/16	4 17/32	340
12913500	400	2000	4 17/32	27 9/16	9 27/32	4 17/32	366
12914000	400	2000	4 17/32	19 5/32	9 27/32	4 17/32	291
12916000	400	1600	6 3/32	31 1/2	15 3/4	8 1/16	1058
12917000	500	2000	6 7/8	31 1/2	15 3/4	8 21/32	1329
12918000	600	2400	7 11/16	31 1/2	15 3/4	9 1/16	1614
12918100	700	2800	7 7/8	33 15/32	15 3/4	9 1/4	1753
12918200	800	3200	8 1/4	33 15/32	15 3/4	9 21/32	1942
12918300	900	3600	9 1/16	35 7/16	15 3/4	10 5/8	2467
12918400	1000	4000	9 7/16	35 7/16	15 3/4	11 1/32	2703
12918500	1250	5000	10 1/4	39 3/8	15 3/4	12 7/16	3481
12918600	1500	6000	10 3/4	39 3/8	15 3/4	12 19/32	3774

Tolerance: Forged parts ± 5%

14-06-2016