


Material : Alloy steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

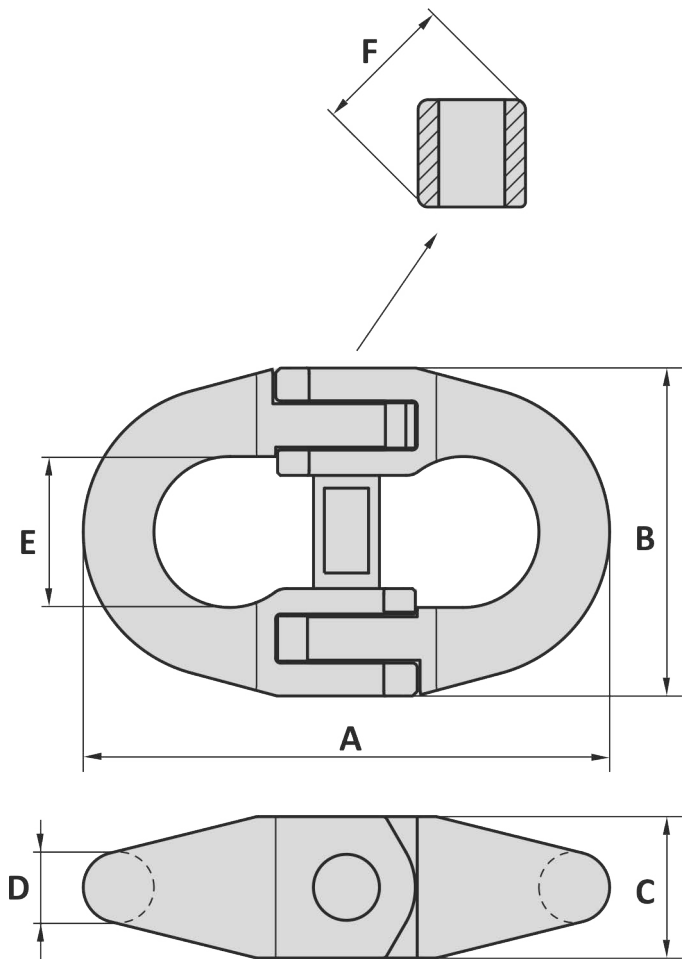

| Art. No. | WLL ton | PL ton | A mm | B mm | C mm | D mm | E mm | F mm | Weight kg |
|----------|------------|-----------|---------|---------|---------|---------|---------|---------|--------------|
| 40000001 | 110 | 220 | 560 | 360 | 108 | 76 | 156 | 150 | 76 |

Tolerance: ± 5%

| Art. No. | WLL ton | PL ton | A inch | B inch | C inch | D inch | E inch | F inch | Weight lbs |
|----------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------------|
| 40000001 | 110 | 220 | 22 1/16 | 14 3/16 | 4 1/4 | 3 | 6 1/8 | 5 7/16 | 168 |

Tolerance: ± 5%

01-07-2011