


## CLOSED WEDGE SOCKETS

## QUENCHED AND TEMPERED CAST STEEL

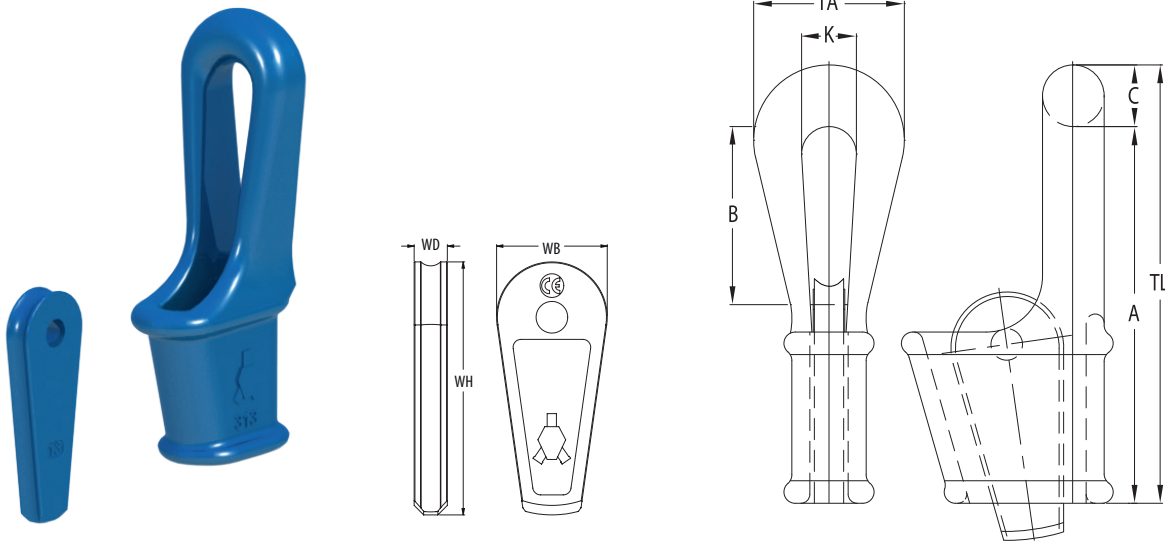

Model No.	MBL (UStons)	for wire ø		Dimensions (inch)									Weight (lbs)
		(mm)	(inch)	A	B	C	K	TA	TL	WH	WB	WD	
CWS 303	44	18-19	¾	8.66	3.94	1.34	1.57	3.54	10.00	6.30	2.76	0.83	15
CWS 304	61	20-22	7/8	8.86	4.92	1.65	1.85	4.33	10.51	7.34	3.03	0.94	20
CWS 305	83	24-26	1	11.42	5.12	1.97	2.17	4.92	13.39	8.33	3.27	1.08	31
CWS 306	99	27-29	1 1/8	12.80	5.71	2.36	2.76	5.98	15.16	9.11	3.58	1.18	49
CWS 307	121	30-32	1 1/4	14.17	6.30	2.68	2.95	6.50	16.85	10.47	4.25	1.30	66
CWS 308	138	34-36	1 3/8	15.75	7.09	2.68	2.95	6.50	18.43	11.73	4.57	1.38	84
CWS 309	165	37-39	1 1/2	19.69	9.45	2.83	3.15	7.28	22.52	13.31	5.12	1.50	108
CWS 310	187	40-42	1 5/8	23.62	12.20	3.15	3.54	8.27	26.77	14.67	5.51	1.61	143
CWS 311	248	43-48	1 3/4 - 1 7/8	25.20	12.80	3.54	3.94	8.86	28.74	16.06	5.75	1.89	220
CWS 312	309	49-52	2	28.35	14.76	3.94	4.33	9.65	32.28	17.72	6.30	2.09	331
CWS 313	397	54-58	2 1/4	30.51	15.75	4.33	4.72	10.43	34.84	18.50	6.61	2.28	353
CWS 314	468	61-64	2 1/2	35.43	18.50	4.92	5.12	11.81	40.35	19.69	6.93	2.56	507
CWS 315	507	72-76	3	39.37	16.73	5.12	5.91	12.99	44.49	21.65	9.61	2.76	794
CWS 316	689	81-86	3 1/4 - 3 3/8	44.29	21.65	5.31	6.50	14.17	49.61	26.38	10.24	3.15	937

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.

