


SHORT BOW SOCKETS

QUENCHED AND TEMPERED CAST STEEL

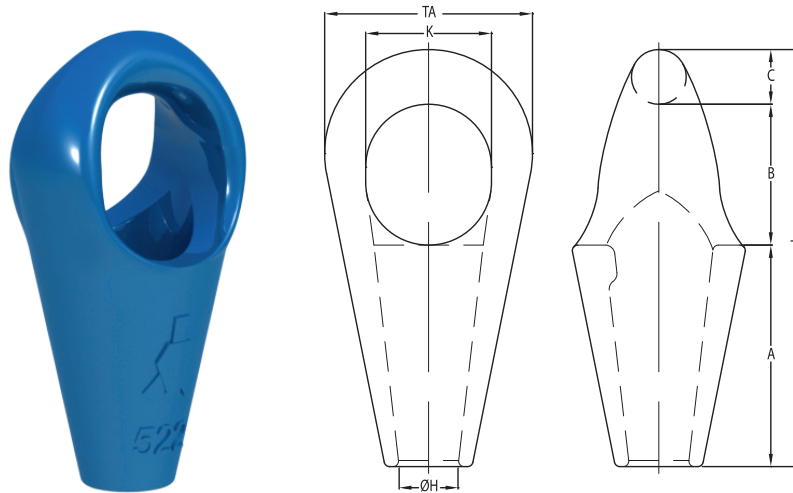

Model No.	MBL (UStons)	for wire ϕ		Dimensions (inch)							Weight (lbs)
		(mm)	(inch)	A	B	C	ϕ H	K	TA	TL	
SBS 512	154	31-36	1¼ - 1⅜	5.55	3.27	1.50	1.52	2.95	5.20	10.31	15
SBS 517	176	37-42	1½ - 1⅝	6.38	4.06	1.57	1.74	3.62	5.98	12.01	22
SBS 519	220	43-48	1¾ - 1⅞	7.40	4.72	1.89	2.01	4.41	7.01	14.02	34
SBS 522	276	49-54	2 - 2⅛	8.03	5.20	2.13	2.32	4.72	7.87	15.35	46
SBS 524	353	55-60	2¼ - 2⅜	9.06	5.83	2.44	2.52	5.31	8.66	17.32	62
SBS 526	441	61-68	2½ - 2⅝	10.43	6.50	2.68	2.95	5.91	9.84	19.61	96
SBS 527	551	69-75	2¾ - 2⅞	11.30	7.01	2.95	3.11	6.46	10.79	21.26	118
SBS 528	661	76-80	3 - 3⅛	12.36	7.68	2.99	3.50	6.89	11.61	23.03	155
SBS 529	772	81-86	3¼ - 3⅜	12.87	8.50	3.23	3.63	7.64	12.60	24.61	179
SBS 530	882	87-93	3½ - 3⅝	14.09	8.66	3.62	3.90	7.95	13.78	26.38	246
SBS 531	992	94-102	3¾ - 4	14.37	9.25	3.94	4.24	8.46	14.76	27.56	287
SBS 533	1102	108-115	4¼ - 4½	16.54	10.63	4.33	4.72	9.45	16.14	31.50	401

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.

