


TAILGRIP OPEN WEDGE SOCKETS WITH PIN

**QUENCHED AND
TEMPERED CAST STEEL**

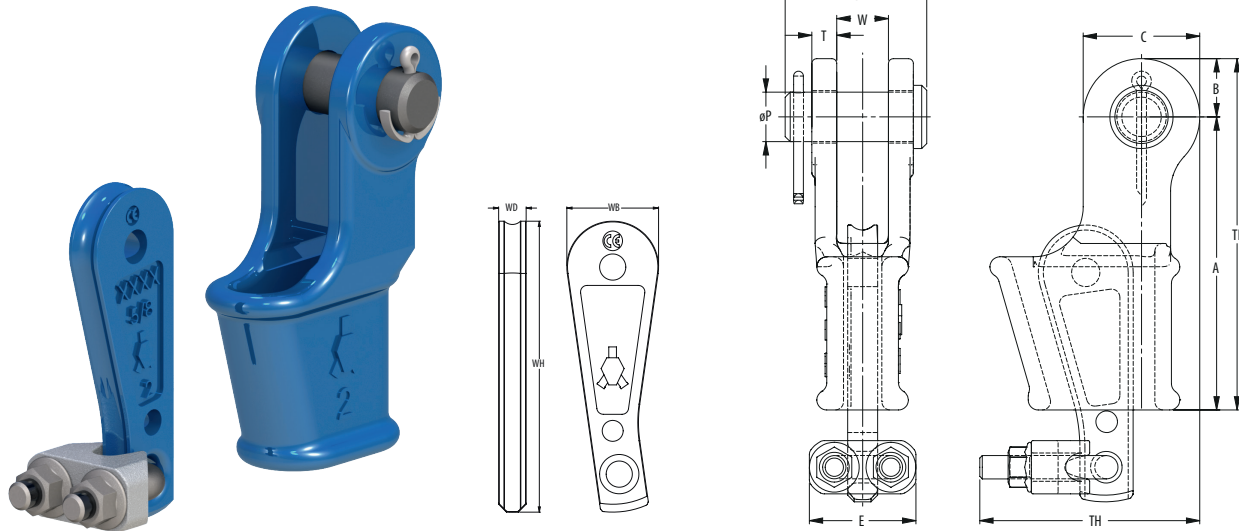

| Model No. | MBL (UStons) | for wire ø | | Dimensions (inch) | | | | | | | | | | | | | Weight (lbs) |
|--------------|-----------------|------------|--------|-------------------|------|------|------|------|------|------|-------|------|------|-------|------|------|-----------------|
| | | (mm) | (inch) | A | B | C | E | øP | T | TH | TL | TB | W | WH | WB | WD | |
| OWS-TG 0.5 P | 13 | 9-10 | 3/8 | 5.71 | 0.91 | 1.81 | 1.57 | 0.81 | 0.43 | 2.99 | 6.61 | 2.48 | 0.81 | 5.12 | 1.42 | 0.47 | 4 |
| OWS-TG 1 P | 22 | 11-13 | 1/2 | 5.75 | 1.12 | 2.24 | 2.17 | 0.98 | 0.47 | 3.94 | 6.87 | 2.64 | 0.98 | 6.69 | 1.89 | 0.55 | 5 |
| OWS-TG 2 P | 28 | 14-16 | 5/8 | 6.93 | 1.38 | 2.76 | 2.52 | 1.18 | 0.59 | 4.92 | 8.31 | 3.35 | 1.22 | 7.66 | 2.24 | 0.71 | 9 |
| OWS-TG 3 P | 44 | 18-19 | 3/4 | 8.27 | 1.57 | 3.15 | 2.68 | 1.38 | 0.63 | 5.59 | 9.84 | 3.74 | 1.50 | 8.74 | 2.76 | 0.83 | 15 |
| OWS-TG 4 P | 61 | 20-22 | 7/8 | 9.35 | 1.87 | 3.74 | 2.91 | 1.61 | 0.71 | 6.46 | 11.22 | 4.33 | 1.73 | 9.86 | 3.03 | 0.94 | 22 |
| OWS-TG 5 P | 83 | 23-26 | 1 | 10.83 | 2.17 | 4.33 | 3.31 | 2.01 | 0.87 | 7.44 | 12.99 | 5.04 | 2.01 | 10.79 | 3.27 | 1.08 | 33 |
| OWS-TG 6 P | 99 | 27-29 | 1 1/8 | 12.20 | 2.56 | 5.12 | 3.74 | 2.24 | 0.98 | 8.54 | 14.76 | 5.59 | 2.24 | 11.48 | 3.58 | 1.18 | 46 |
| OWS-TG 7 P | 121 | 30-32 | 1 1/4 | 13.78 | 2.87 | 5.75 | 4.13 | 2.48 | 1.10 | 9.37 | 16.65 | 6.10 | 2.48 | 13.74 | 4.25 | 1.30 | 68 |

MBL = Minimum Breaking Load


- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



**SEE OUR WARNING &
SAFETY INFORMATION**

TAILGRIP OPEN WEDGE SOCKETS WITH BOLT AND NUT

QUENCHED AND TEMPERED CAST STEEL

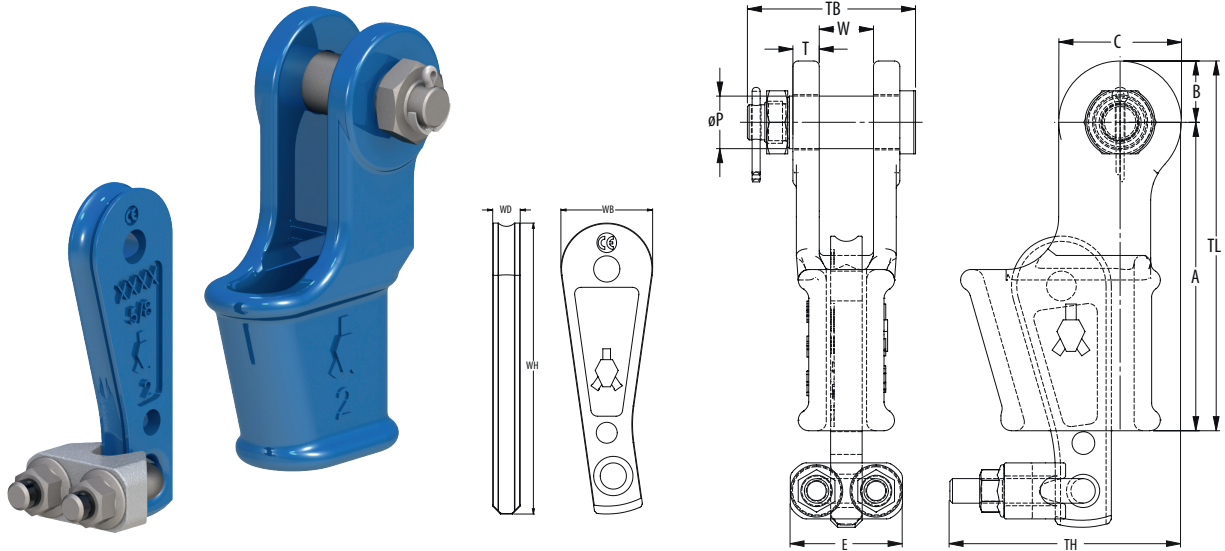

| Model No. | MBL (UStons) | for wire ø | | Dimensions (inch) | | | | | | | | | | | | | Weight (lbs) |
|--------------|-----------------|------------|--------|-------------------|------|------|------|------|------|------|-------|------|------|-------|------|------|-----------------|
| | | (mm) | (inch) | A | B | C | E | øP | T | TH | TL | TB | W | WH | WB | WD | |
| OWS-TG 0.5 B | 13 | 9-10 | 3/8 | 5.71 | 0.91 | 1.81 | 1.57 | 0.81 | 0.43 | 2.99 | 6.61 | 2.48 | 0.81 | 5.12 | 1.42 | 0.47 | 4 |
| OWS-TG 1 B | 22 | 11-13 | 1/2 | 5.75 | 1.12 | 2.24 | 2.17 | 0.98 | 0.47 | 3.94 | 6.87 | 2.64 | 0.98 | 6.69 | 1.89 | 0.55 | 5 |
| OWS-TG 2 B | 28 | 14-16 | 5/8 | 6.93 | 1.38 | 2.76 | 2.52 | 1.18 | 0.59 | 4.92 | 8.31 | 3.35 | 1.22 | 7.66 | 2.24 | 0.71 | 9 |
| OWS-TG 3 B | 44 | 18-19 | 3/4 | 8.27 | 1.57 | 3.15 | 2.68 | 1.38 | 0.63 | 5.59 | 9.84 | 3.74 | 1.50 | 8.74 | 2.76 | 0.83 | 15 |
| OWS-TG 4 B | 61 | 20-22 | 7/8 | 9.35 | 1.87 | 3.74 | 2.91 | 1.61 | 0.71 | 6.46 | 11.22 | 4.33 | 1.73 | 9.86 | 3.03 | 0.94 | 22 |
| OWS-TG 5 B | 83 | 23-26 | 1 | 10.83 | 2.17 | 4.33 | 3.31 | 2.01 | 0.87 | 7.44 | 12.99 | 5.04 | 2.01 | 10.79 | 3.27 | 1.08 | 33 |
| OWS-TG 6 B | 99 | 27-29 | 1 1/8 | 12.20 | 2.56 | 5.12 | 3.74 | 2.24 | 0.98 | 8.54 | 14.76 | 5.59 | 2.24 | 11.48 | 3.58 | 1.18 | 46 |
| OWS-TG 7 B | 121 | 30-32 | 1 1/4 | 13.78 | 2.87 | 5.75 | 4.13 | 2.48 | 1.10 | 9.37 | 16.65 | 6.10 | 2.48 | 13.74 | 4.25 | 1.30 | 68 |

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



**SEE OUR WARNING &
SAFETY INFORMATION**