
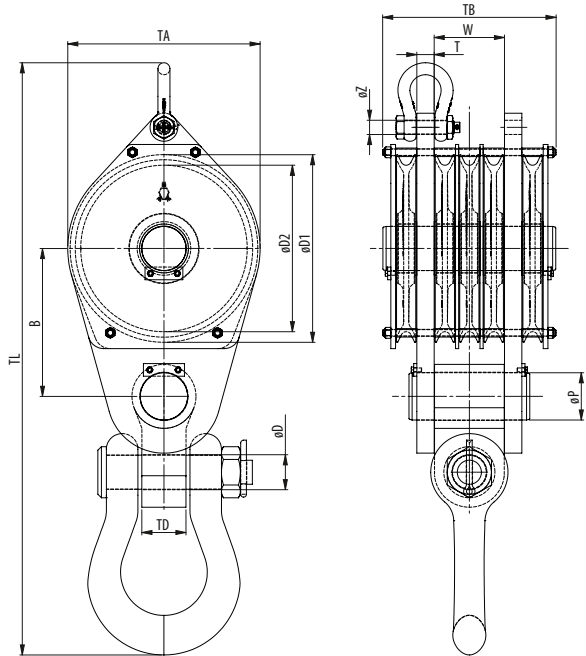


CONSTRUCTION BLOCK WITH SHACKLE

5 SHEAVE

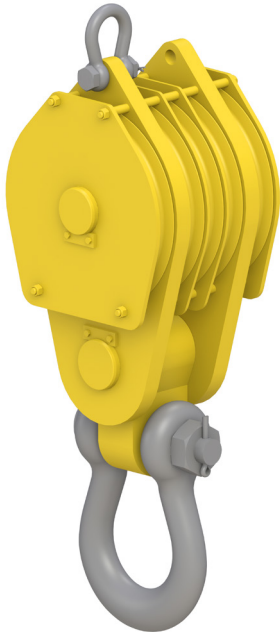

| Model No.       | WLL<br>(UStons) | For wire ød<br>(inch) | Dimensions (inch) |      |      |     |     |     |     |     |      |      |      |      | Weight<br>(lbs) |
|-----------------|-----------------|-----------------------|-------------------|------|------|-----|-----|-----|-----|-----|------|------|------|------|-----------------|
|                 |                 |                       | øD1               | øD2  | B    | øD  | øP  | TD  | øZ  | T   | TA   | TB   | TL   | W    |                 |
| CB 260.xx.5.50  | 55              | ½ - ⅝                 | 11.8              | 10.2 | 10.7 | 2.7 | 3.1 | 2.6 | 1.1 | 1.2 | 12.2 | 14.8 | 41.4 | 5.8  | 412             |
| CB 320.xx.5.73  | 80              | ⅝ - ¾                 | 14.4              | 12.6 | 12.5 | 3.4 | 3.9 | 4.3 | 1.2 | 1.4 | 14.8 | 16.1 | 51.7 | 6.8  | 713             |
| CB 355.xx.5.95  | 105             | ¾ - ⅞                 | 16.1              | 14.0 | 14.1 | 3.4 | 5.1 | 4.3 | 1.6 | 1.8 | 16.5 | 19.0 | 57.6 | 7.8  | 993             |
| CB 400.xx.5.120 | 132             | ¾ - 1                 | 18.1              | 15.7 | 15.3 | 3.9 | 5.1 | 4.7 | 1.6 | 1.8 | 18.5 | 19.3 | 64.7 | 7.8  | 1352            |
| CB 450.xx.5.145 | 160             | ⅞ - 1⅛                | 20.3              | 17.7 | 16.9 | 4.4 | 5.9 | 5.5 | 1.8 | 2.2 | 20.9 | 21.7 | 70.4 | 8.8  | 1971            |
| CB 528.xx.5.173 | 191             | ⅞ - 1¼                | 23.4              | 20.8 | 18.5 | 4.4 | 5.9 | 5.5 | 1.8 | 2.2 | 24.0 | 21.7 | 73.5 | 8.8  | 2366            |
| CB 575.xx.5.191 | 210             | 1 - 1⅞                | 25.6              | 22.6 | 20.2 | 5.2 | 6.7 | 5.5 | 2.1 | 2.4 | 26.4 | 25.1 | 85.0 | 10.5 | 3267            |
| CB 630.xx.5.220 | 243             | 1 - 1½                | 28.0              | 24.8 | 21.4 | 5.2 | 6.7 | 5.5 | 2.1 | 2.4 | 28.7 | 25.1 | 87.4 | 10.5 | 3403            |

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY  
INFORMATION ON PAGES 136 - 149

Optional

With hanger

With pin

With swivel eye

With swivel jaw

