


SOFTSLING FRIENDLY ROV HOOK

TYPE HK14

Material	: Forged steel
Safety	: 4 times
Finish	: Painted
Temperature range	: -40°F up to +392°F; Polar Rated
Standard certification	: Certificate of Conformity 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

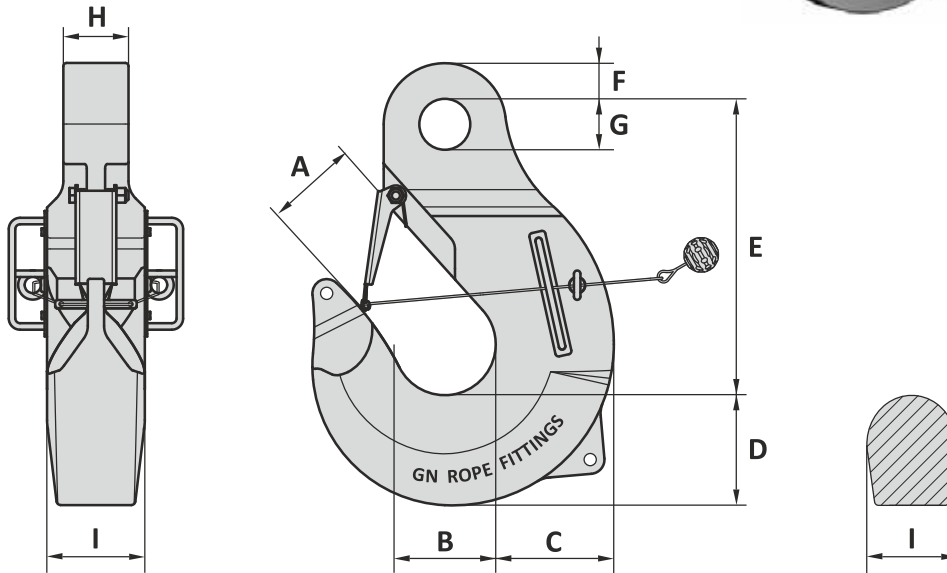

Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	Weight lbs
73000050	50	200	4 ¹ / ₁₆	4 ²³ / ₃₂	5 ¹ / ₂	4 ¹⁵ / ₁₆	15 ⁷ / ₁₆	1 ¹⁵ / ₁₆	2 ³ / ₈	2 ³ / ₈	3 ³ / ₁₆	146
73000063	63	250	4 ³ / ₃₂	5 ¹ / ₈	6 ³ / ₁₆	5 ¹ / ₂	16 ²¹ / ₃₂	2 ³ / ₃₂	3 ¹¹ / ₃₂	2 ³ / ₄	3 ¹⁵ / ₁₆	198
73000080	80	320	4 ¹ / ₁₆	5 ¹ / ₂	7 ³ / ₃₂	6 ³ / ₁₆	18 ³ / ₁₆	2 ³ / ₈	3 ³ / ₁₆	3 ³ / ₃₂	4 ²³ / ₃₂	293
73000100	100	400	5 ¹⁹ / ₃₂	6 ³ / ₁₆	7 ¹⁵ / ₃₂	6 ¹ / ₂	20 ⁷ / ₁₆	2 ¹ / ₁₆	4 ³ / ₁₆	3 ¹⁵ / ₁₆	5 ¹ / ₂	412
73000150	150	600	6 ³ / ₁₆	7 ³ / ₃₂	9 ¹ / ₁₆	7 ³ / ₈	23 ³ / ₃₂	2 ³ / ₄	4 ²³ / ₃₂	4 ²³ / ₃₂	7 ³ / ₃₂	692
73000200	200	800	7 ³ / ₃₂	8 ¹ / ₄	10 ¹ / ₄	9 ¹ / ₁₆	26 ³ / ₁₆	3 ³ / ₃₂	5 ⁵ / ₁₆	5 ²⁹ / ₃₂	7 ⁷ / ₈	1030
73000250	250	1000	8 ¹⁹ / ₃₂	9 ²⁷ / ₃₂	11 ¹³ / ₃₂	10 ¹ / ₄	29 ¹⁷ / ₃₂	3 ³ / ₁₆	5 ²⁹ / ₃₂	6 ¹¹ / ₁₆	9 ¹ / ₁₆	1446
73000300	300	1200	10 ³ / ₁₆	11 ¹³ / ₁₆	12 ¹⁹ / ₃₂	11 ¹⁹ / ₃₂	34 ¹ / ₁₆	3 ¹ / ₁₆	6 ³ / ₁₆	7 ³ / ₃₂	10 ¹ / ₄	2017
73000400	400	1600	11 ¹⁹ / ₃₂	12 ¹⁹ / ₃₂	13 ²⁵ / ₃₂	12 ¹⁹ / ₃₂	35 ¹³ / ₁₆	4 ¹ / ₈	7 ³ / ₃₂	7 ⁷ / ₈	11 ¹⁹ / ₁₆	2685
73000500	500	2000	11 ¹ / ₁₆	13 ³ / ₈	15 ¹¹ / ₃₂	13 ³ / ₈	38 ²⁵ / ₃₂	4 ³ / ₁₆	7 ¹ / ₃₂	8 ²¹ / ₃₂	12 ¹⁹ / ₃₂	3397
73000600	600	2400	11 ²¹ / ₃₂	13 ²⁵ / ₃₂	16 ¹⁷ / ₃₂	14 ³ / ₁₆	40 ³ / ₄	4 ²³ / ₃₂	8 ¹ / ₄	9 ²⁷ / ₃₂	13 ³ / ₈	4151
73000700	700	2800	12 ¹⁵ / ₃₂	14 ³ / ₁₆	17 ²³ / ₃₂	15 ¹¹ / ₃₂	41 ³ / ₄	4 ¹ / ₁₆	8 ²¹ / ₃₂	11 ¹ / ₃₂	14 ³¹ / ₃₂	5049
73000800	800	3200	12 ⁷ / ₁₆	14 ³¹ / ₃₂	19 ¹¹ / ₁₆	17 ³ / ₁₆	46 ⁷ / ₁₆	5 ¹ / ₂	9 ⁷ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄	6601

Tolerance: Machined parts ± 1/32 inch

GN ROPE FITTINGS


North American Stocking Distributor

8125 Saran Dr. • Playa del Rey, CA 90293

Phone: 310.448.5444 • Fax: 310.448.5446

sales@awrrinc.com

www.AssociatedWireRope.com




SOFTSLING FRIENDLY ROV HOOK

TYPE HK14

Material : Forged steel
 Safety : 4 times
 Finish : Painted
 Temperature range : -40°C up to +200°C; Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

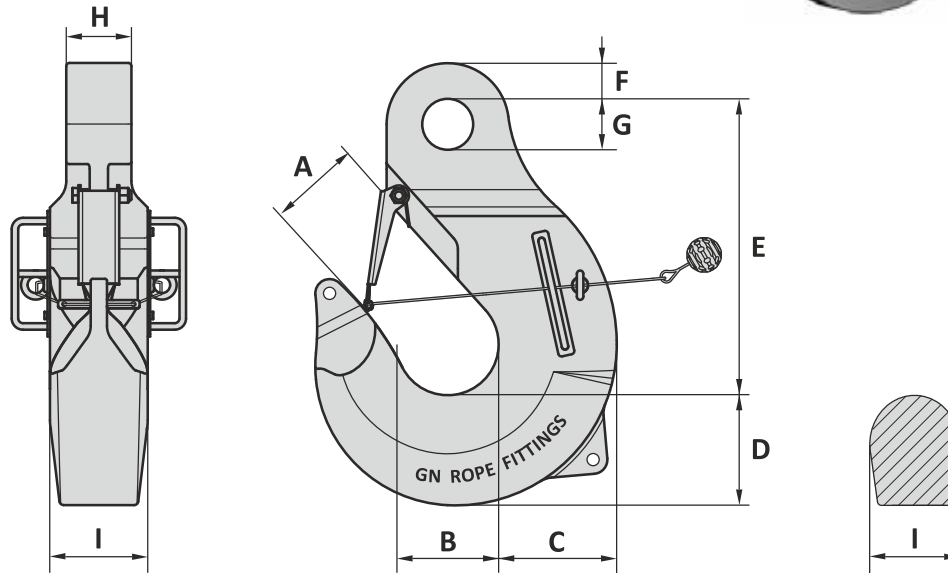


Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
73000050	50	200	103	120	140	125	392	49	73	60	90	66
73000063	63	250	109	130	160	140	423	53	85	70	100	90
73000080	80	320	119	140	180	160	465	60	90	80	120	133
73000100	100	400	142	160	190	165	530	65	110	100	140	187
73000150	150	600	157	180	230	200	590	70	120	120	180	314
73000200	200	800	180	210	260	230	675	80	130	150	200	467
73000250	250	1000	218	250	290	260	750	90	150	170	230	656
73000300	300	1200	259	300	320	290	865	100	160	180	260	915
73000400	400	1600	280	320	350	320	910	105	180	200	300	1218
73000500	500	2000	294	340	390	340	985	110	190	220	320	1541
73000600	600	2400	304	350	420	370	1035	120	210	250	340	1883
73000700	700	2800	317	360	450	390	1060	125	220	280	380	2290
73000800	800	3200	327	380	500	440	1180	140	240	300	400	2994

Tolerance: Machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS