


FIBRE ROPE THIMBLE

TYPE K3

Material : Mild steel
 Finish : Galvanised
 Temperature range : -4°F up to +392°F
 Standard certification : Certificate of Conformity

Suitable for fibre rope

Non-standard sizes or custom products available on request

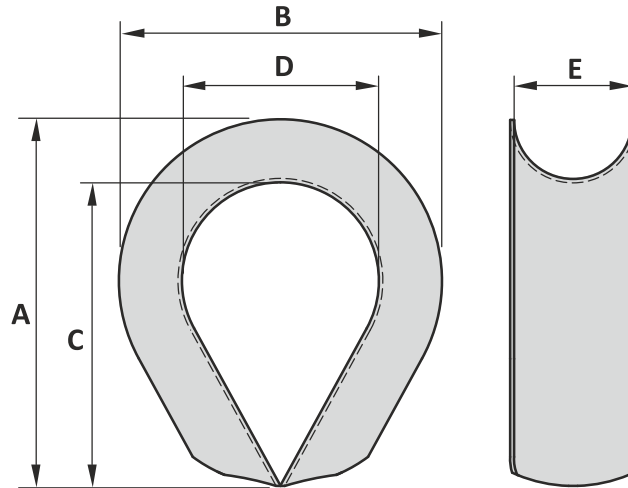


Can be assembled with our range of SC1 and SC5 links and HK2 hooks on request

Art. No.	A inch	B inch	C inch	D inch	E inch	Packing	Weight lbs/100
12022500	2 ¼	1 27/32	1 23/32	1 1/32	5/8	25	18
12025000	2 ½	2 3/32	1 7/8	1 ¼	23/32	25	31
12030000	3	2 ½	2 5/32	1 ½	25/32	25	55
12040000	4	2 15/16	3 1/16	1 31/32	1 ¼	25	110
12050000	5	4 3/16	3 ¾	2 5/16	1 5/16	25	176
12060000	6	4 23/32	4 17/32	2 15/16	1 7/8	10	198
12070000	7	5 ½	5 ½	3 11/32	2 3/16	10	397
12080000	8	6 5/16	6 3/16	4 1/8	2 ½		683
12090000	9	7 3/32	6 7/8	4 5/16	2 27/32		1168
12100000	10	7 7/8	7 15/32	4 23/32	3 5/32		1433
12110000	11	8 21/32	8 ¼	5 23/32	3 15/32		1984
12120000	12	9 21/32	9 1/16	5 29/32	4		2646
12140000	14	11 13/16	11 19/32	6 11/16	4 17/32		3968
12160000	16	12 19/32	12 3/16	7 3/32	5 1/8		5401
12180000	18	13 25/32	13 3/8	8 1/16	5 29/32		7055

Tolerance: Forged parts ± 5%

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com




FIBRE ROPE THIMBLE

TYPE K3

Material : Mild steel
 Finish : Galvanised
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

Suitable for fibre rope
 Non-standard sizes or custom products available on request

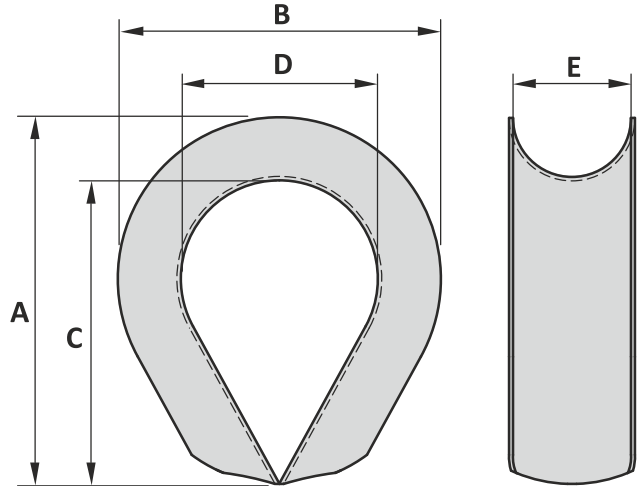


Can be assembled with our range of SC1 and SC5 links and HK2 hooks on request

Art. No.	A inch	B mm	C mm	D mm	E mm	Packing	Weight kg/100
12022500	2 ¼	47	42	26	16	25	8.2
12025000	2 ½	55	48	32	18	25	14
12030000	3	64	58	38	20	25	25
12040000	4	75	78	50	32	25	50
12050000	5	110	95	65	40	25	80
12060000	6	120	115	75	48	10	90
12070000	7	140	140	85	56	10	180
12080000	8	160	160	105	64		310
12090000	9	180	175	110	72		530
12100000	10	200	190	120	80		650
12110000	11	220	210	145	88		900
12120000	12	245	230	150	102		1200
12140000	14	300	290	170	115		1800
12160000	16	320	310	185	130		2450
12180000	18	350	340	205	150		3200

Tolerance: Forged parts ± 5%

GN ROPE FITTINGS
 North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS