


HEAVY DUTY PELICAN SLIPHOOK

TYPE HK3

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -4°F up to +392°F
 Standard certification : Certificate of Conformity

Non-standard sizes or custom products available on request

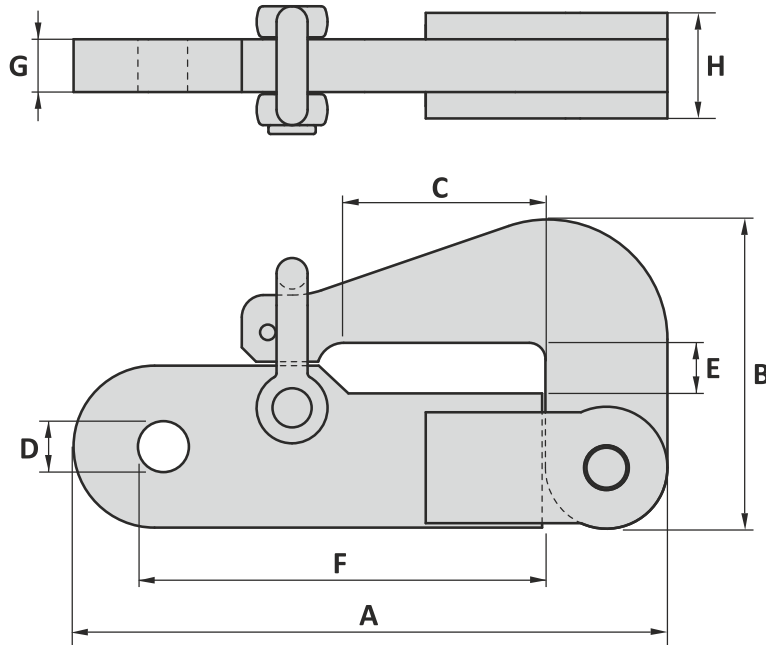


Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	Weight lbs
75000003	3.5	17.5	12 ²⁹ / ₃₂	6 ⁷ / ₃₂	3 ¹ / ₃₂	1 ¹ / ₃₂	1 ³ / ₈	9 ⁷ / ₁₆	2 ⁵ / ₃₂	2 ⁷ / ₈	15
75000005	5	25	13 ³ / ₁₆	6 ¹ / ₃₂	3 ¹⁵ / ₁₆	1 ¹ / ₂	1 ³ / ₈	9 ⁷ / ₃₂	1 ³ / ₁₆	2 ³ / ₄	26
75000008	8	40	16 ¹ / ₃₂	7 ⁷ / ₈	5 ²⁹ / ₃₂	1 ³ / ₃₂	2 ⁵ / ₃₂	11 ¹³ / ₁₆	1 ³ / ₁₆	2 ³ / ₄	37
75000012	12.5	62.5	19 ³ / ₁₆	9 ³ / ₄	6 ⁷ / ₁₆	2 ⁵ / ₃₂	2 ⁷ / ₁₆	14 ³ / ₃₂	1 ³ / ₈	2 ¹ / ₁₆	57
75000017	17	85	21 ² / ₃₂	10 ³ / ₁₆	6 ¹ / ₂	2 ⁵ / ₃₂	2 ³ / ₄	15 ¹ / ₃₂	1 ²⁵ / ₃₂	3 ³ / ₄	99
75000025	25	125	24	12 ¹ / ₂	7 ³ / ₃₂	2 ⁷ / ₈	3	16 ¹⁵ / ₁₆	1 ²⁵ / ₃₂	4 ¹ / ₈	137
75000035	35	175	26 ³ / ₈	13 ³ / ₃₂	7 ⁷ / ₈	2 ³ / ₈	3 ¹ / ₃₂	18 ⁵ / ₁₆	1 ³ / ₃₂	4 ³ / ₁₆	220
75000055	55	275	30 ¹ / ₂	16 ¹ / ₈	9 ⁷ / ₁₆	2 ¹⁵ / ₁₆	3 ³ / ₁₆	19 ¹ / ₁₆	2 ³ / ₈	5 ¹ / ₈	335
75000085	85	425	40 ⁵ / ₃₂	19 ³ / ₃₂	12 ³ / ₁₆	4 ¹ / ₁₆	4 ⁵ / ₁₆	27 ²³ / ₃₂	3 ¹ / ₁₆	7 ⁷ / ₈	776
75000120	120	600	48 ¹³ / ₁₆	25 ¹⁹ / ₃₂	16 ⁷ / ₁₆	4 ¹ / ₈	6 ³ / ₁₆	33 ²⁵ / ₃₂	3 ¹ / ₁₆	8 ² / ₃₂	1155
75000150	150	750	51 ¹ / ₂	27 ¹ / ₁₆	18 ³ / ₃₂	4 ¹ / ₃₂	7 ³ / ₃₂	36 ³ / ₁₆	3 ¹ / ₁₆	9 ³ / ₁₆	1358

Tolerance: Forged parts $\pm 5\%$, machined parts $\pm \frac{1}{32}$ inch

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com




HEAVY DUTY PELICAN SLIPHOOK

TYPE HK3

Material : High tensile steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

Non-standard sizes or custom products available on request

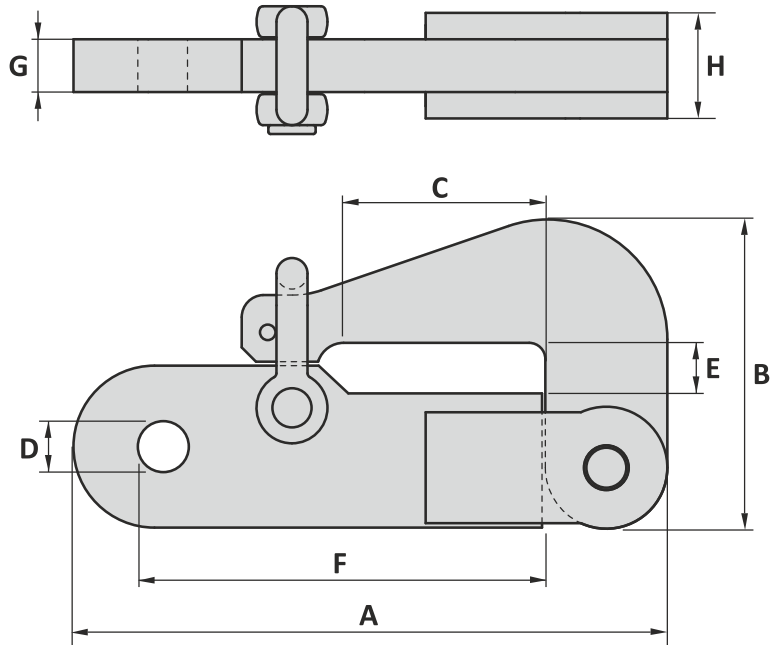


Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg
75000003	3.5	17.5	328	155	85	26	35	240	20	54	6.7
75000005	5	25	338	161	100	38	35	234	30	60	12
75000008	8	40	415	200	150	50	55	300	30	70	17
75000012	12.5	62.5	491	235	160	55	65	358	35	75	26
75000017	17	85	550	265	165	55	70	390	45	95	45
75000025	25	125	610	308	180	60	76	430	45	105	62
75000035	35	175	670	355	200	60	85	465	50	110	100
75000055	55	275	775	410	230	75	90	500	60	130	152
75000085	85	425	1020	490	310	103	110	704	100	200	352
75000120	120	600	1240	650	418	105	160	858	100	220	524
75000150	150	750	1308	710	482	115	180	919	100	240	616

Tolerance: Forged parts $\pm 5\%$, machined parts ± 1 mm

GN ROPE FITTINGS

North American Stocking Distributor



8125 Saran Dr. • Playa del Rey, CA 90293
 Phone: 310.448.5444 • Fax: 310.448.5446
 sales@awrrinc.com
 www.AssociatedWireRope.com



GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS

HOOKS

MOORING

SPECIALS